


Makita®

18V LITHIUM-ION



It's All The POWER You Need!

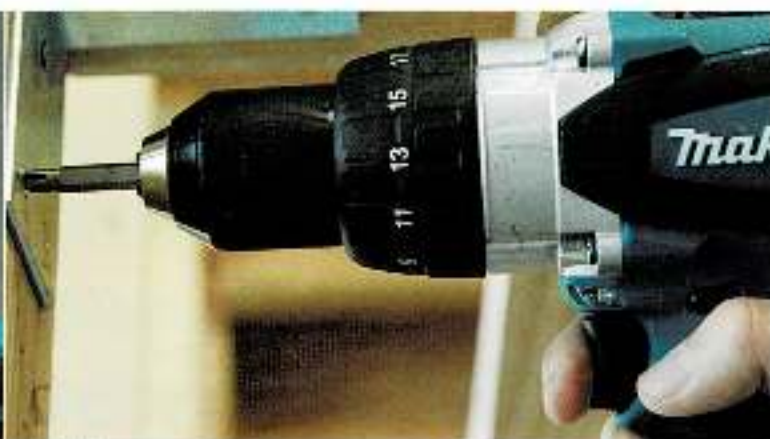

DF010DS

CORDLESS DRIVER DRILL

7.2V



Capacity
Steel: 3mm (3/64")
Wood: 5mm (3/16")
H: 50mm (2")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: Charger, Battery, Carrying Case

DF332DWYE

CORDLESS DRIVER DRILL

7.2V



Capacity
Steel: 10mm (3/8")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: DF332DWYE: Driver, 2pc Battery, Charger, Carrying Case
DF332DZ: Driver, 2pc Battery, Charger, Carrying Case

DF331DWYE

CORDLESS DRIVER DRILL

12V



Capacity
Steel: 10mm (3/8")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: DF331DWYE: Driver, 2pc Battery, Charger, Carrying Case
DF331DZ: Driver, 2pc Battery, Charger, Carrying Case

DP4010

24V ELECTRIC DRILL

419



Capacity
Steel: 11mm (7/16")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: Carrying Case, Battery, Charger

DA332DZ

CORDLESS ANGLE DRILL

12V



Capacity
Steel: 10mm (3/8")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: Charger, Battery, Carrying Case

DDA350Z

CORDLESS ANGLE DRILL

18V



Capacity
Steel: 10mm (3/8")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: Charger, Battery, Carrying Case

DA3010

ELECTRIC ANGLE DRILL

419



Capacity
Steel: 11mm (7/16")
Wood: 25mm (1-1/8")
H: 100mm (4")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")
Straight Type: 27mm (1")
D: 10mm (3/8")
Hole/Slot: 3.5/5.5mm
Pilot Type: 20mm (3/4")
D: 10mm (3/8")

Includes: Carrying Case

TOOL ONLY
Charger & Battery are sold separately

TOOL ONLY
Charger & Battery are sold separately

Includes: Carrying Case

DRILLING & FASTENING

DA4000LR

ELECTRIC ANGLE DRILL

303



Continuous rating input
Capacity:
Steel 12mm (1/2")
Wood (not loadable) 11 x 25mm (3/8" x 1")
L x W (mm) (inches)
H x 14mm (1/2")
L x 12mm (1/2")
No load speed (RPM) 11,000 (1 in. 14mm)
Overall length 410mm (16 1/8")
Net weight 4.0kg (8.8lbs)
Includes: Angle Adapter, Drive Key, Hex Wrench, Side Grip

6010BVR

ELECTRIC DRILL

64



Continuous rating input
Capacity:
Steel 10mm (3/8")
Wood 15mm (1/2")
No load speed (RPM) 0-1,800
Overall length 203mm (8 1/8")
Net weight 1.6kg (3.5lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key

6401

ELECTRIC DRILL

103



Continuous rating input
Capacity:
Steel 13mm (1/2")
Wood 18mm (3/4")
No load speed (RPM) 1,700
Overall length 260mm (10 5/8")
Net weight 2.2kg (4.8lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key, Side grip

6411

ELECTRIC DRILL

64



Continuous rating input
Capacity:
Steel 12mm (1/2")
Wood 25mm (1")
No load speed (RPM) 2,400
Dimensions (L x W x H) 220mm (8 11/16") x 27mm (1 1/8") x 117mm (4 5/8")
Net weight 1.3kg (2.8lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key

6412

ELECTRIC DRILL

64



Continuous rating input
Capacity:
Steel 12mm (1/2")
Wood 25mm (1")
No load speed (RPM) 2,400
Dimensions (L x W x H) 220mm (8 11/16") x 27mm (1 1/8") x 117mm (4 5/8")
Net weight 1.3kg (2.8lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key

6510LVR

ELECTRIC DRILL

64



Continuous rating input
Capacity:
Steel 13mm (1/2")
Wood 18mm (3/4")
No load speed (RPM) 0-1,200
Overall length 240mm (9 1/2")
Net weight 1.4kg (3.1lbs)
Power supply cord 2.0m (6.6ft)

DP4700

ELECTRIC DRILL

64



Continuous rating input
Capacity:
Steel 12mm (1/2")
Wood 30mm (1 1/8")
No load speed (RPM) 1,500
Overall length 270mm (10 7/8")
Net weight 2.2kg (4.8lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key, Side grip

DS4010

ELECTRIC DRILL

411



Continuous rating input
Capacity:
Steel 13mm (1/2")
Wood 30mm (1 1/8")
No load speed (RPM) 1,400
Dimensions (L x W x H) 240mm (9 1/2") x 27mm (1 1/8") x 117mm (4 5/8")
Net weight 2.6kg (5.7lbs)
Power supply cord 2.5m (8.2ft)

Includes: Chuck key, Side grip

6301

ELECTRIC DRILL

106



Continuous rating input
Capacity:
Steel 13mm (1/2")
Wood 30mm (1 1/8")
No load speed (RPM) 1,300
Overall length 340mm (13 3/8")
Net weight 2.8kg (6.1lbs)
Power supply cord 2.5m (8.2ft)

Includes: Chuck key, Depth gauge assembly, Side grip

6307

ELECTRIC DRILL

419



Continuous rating input
Capacity:
Steel 13mm (1/2")
Wood 30mm (1 1/8")
No load speed (RPM) 1,200
Overall length 261mm (10 3/8")
Net weight 1.4kg (3.1lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key

6016

ELECTRIC DRILL

51



Continuous rating input
Capacity:
Steel 16mm (5/8")
Wood 30mm (1 1/8")
No load speed (RPM) 700
Overall length 302mm (11 7/8")
Net weight 4.1kg (9.0lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key, Depth gauge, Side grip

TB131

ELECTRIC DRILL PRESS



Continuous rating input
Capacity:
Steel 15mm (1/2")
Wood 24mm (1 1/8")
No load speed (RPM) 1,700 (500Hz)
Net weight 20kg (44.1lbs)
Power supply cord 1.75m (5.7ft)

Includes: Chuck key, Wheel

6501

HIGH SPEED ELECTRIC DRILL

71



Continuous rating input
Capacity:
Steel 5.5mm (1/8")
Wood 8mm (5/16")
No load speed (RPM) 4,500
Overall length 206mm (8 1/8")
Net weight 2.2kg (4.8lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key, Copper Pin

DP2010

HIGH SPEED ELECTRIC DRILL

419



Continuous rating input
Capacity:
Steel 5.5mm (1/8")
Wood 8mm (5/16")
No load speed (RPM) 4,500
Dimensions (L x W x H) 206mm (8 1/8") x 27mm (1 1/8") x 117mm (4 5/8")
Net weight 1.4kg (3.1lbs)
Power supply cord 2.0m (6.6ft)

Includes: Chuck key, Depth Gauge

ICON GUIDE



VARIABLE SPEED



BRAKE



BUILT-IN JOB LIGHT



CARRYING CASE



DOUBLE INSULATION



ELECTRONIC 3 SPEED



REVERSING



ELECTRONIC 3 SPEED



KEYLESS CHUCK



MECHANICAL 3 SPEED



REVERSING



VARIABLE SPEED

DRILLING & FASTENING

DF001DW

3.6V

CORDLESS SCREWDRIVER



Capacity	220
No Load Speed (RPM)	200
Max Fastening Torque	4.0 Nm (28.8 in-lb)
Charging Time (hours)	2-3
Dimensions (L x W x H)	Stroke: 200 mm (7.87 in)
	(11.4 x 4.1 x 1.5 in)
	(11.4 x 4.1 x 1.5 in)
	(11.4 x 4.1 x 1.5 in)
Net weight	Less than 0.5 kg

Includes: Charger, 30 Min. Carry Case

6723DW

4.8V

CORDLESS SCREWDRIVER



Capacity	220
No Load speed (RPM)	4.28 (4000)
Max. fastening torque	20.4 Nm (14.8 in-lb)
Dimensions (L x W x H)	(11.4 x 4.1 x 1.5 in)
Net weight	0.5 kg (1.1 lb)

Includes: Charger, 30 Min. Carry Case

DTL061Z

18V

CORDLESS IMPACT DRIVER



Capacity	4000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

DFS451Z

18V

CORDLESS SCREWDRIVER



Capacity	4000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

FS4000

410

ELECTRIC DRYWALL SCREWDRIVER



Continuous running time	27 min
Capacity	2700
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

FS2700

410

ELECTRIC DRYWALL SCREWDRIVER



Continuous running time	27 min
Capacity	2700
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

TD020DSW

7.2V

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

TD090DWE

10.8V

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

TD111DWYE

TD111DZ

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

TD110DWYE

TD110DZ

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

DTD170Z

18V

CORDLESS IMPACT DRIVER



Capacity	4000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

DTD155RF

DTD155Z

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

DTD152RF

DTD152Z

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

DTD146Z

18V 440

CORDLESS IMPACT DRIVER



Capacity	2000
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

TD0101

411

ELECTRIC IMPACT DRIVER



Continuous running time	27 min
Capacity	2700
Machine screw	M4-M6 (3/16" - 5/16")
Standard bit	M4-M12 (5/16" - 1/2")
High torque bit	M4-M12 (5/16" - 1/2")
Clutch (torque in lb-ft)	22-75 (20-68)
Max. torque	80 Nm (58.7 ft-lb)
No Load Speed (RPM)	0-2000
Impact Per Minute (IPM)	0-3000
Max. Fastening Torque	60 Nm (43.9 ft-lb)
Net weight	1.4-2.0 kg (3.1-4.4 lb)

Includes: Charger, 30 Min. Carry Case

ICON GUIDE

BRAND

BUILT IN LIGHT

CARRYING CASE

DOUBLE INSULATION

ELECTRONIC SPEED

REVERSING

TORQUE SETTING

TORQUE SETTING 2

VARIABLE SPEED

MECHANICAL SPEED



HP332DWYE **HP332DZ** CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 6mm (1/8")
Chuck capacity	15 - 13 mm (1/2" - 5/8")
Impacts per minute (IPM)	H: 0-22,500 (0-2,400)
No load speed (RPM)	H: 0-1,500 (0-1,400)
Max. twisting torque	Hard: 25 Nm (18 ft-lb) Soft: 21 Nm (15 ft-lb)
Max. lock torque	24 Nm (18 ft-lb)
Net weight	1.1 kg (2.4 lb)

Includes:
HP332DWYE: Charger, Tool Bag, Battery, Drill Bit, Carrying Case
HP332DZ: Tool Bag, Carrying Case

DHP456Z CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 10mm (3/8")
Impacts per minute (IPM)	H: 0-22,500 L: 0-6,000
No load speed (RPM)	H: 0-1,500 L: 0-400
Max. twisting torque	Hard: 30 Nm Soft: 25 Nm
Net weight	1.9 kg (4.2 lb)

Includes:
TOOL ONLY
Charger & Battery are sold separately

HP331DWYE **HP331DZ** CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 6mm (1/8")
Chuck capacity	15 - 13 mm (1/2" - 5/8")
Impacts per minute (IPM)	H: 0-22,500 (0-2,400)
No load speed (RPM)	H: 0-1,500 (0-1,400)
Max. twisting torque	Hard: 25 Nm (18 ft-lb) Soft: 21 Nm (15 ft-lb)
Max. lock torque	24 Nm (18 ft-lb)
Net weight	1.1 kg (2.4 lb)

Includes:
HP331DWYE: Charger, Tool Bag, Battery, Drill Bit, Carrying Case
HP331DZ: Tool Bag, Carrying Case

DHP458Z CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 15mm (3/4")
Impacts per minute (IPM)	H: 0-22,500 L: 0-6,000
No load speed (RPM)	H: 0-1,500 L: 0-400
Max. twisting torque	Hard: 35 Nm Soft: 25 Nm
Net weight	2.3 kg (5.1 lb)

Includes:
TOOL ONLY
Charger & Battery are sold separately

DHP453RFX4 **DHP453Z** CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 12mm (1/2")
Impacts per minute (IPM)	H: 0-10,000 L: 0-4,000
No load speed (RPM)	H: 0-1,500 L: 0-400
Max. twisting torque	Hard: 45 Nm Soft: 25 Nm
Net weight	1.9 kg (4.2 lb)

Includes:
DHP453RFX4: Charger, Tool Bag, Battery, Drill Bit, Carrying Case
DHP453Z: Tool Bag, Carrying Case

DHP480RFE **DHP480Z** CORDLESS HAMMER DRIVER DRILL



Capacity	Steel: 13mm (1/2") Wood: 25mm (1-1/8") Masonry: 15mm (3/4")
Impacts per minute (IPM)	H: 0-22,500 L: 0-6,000
No load speed (RPM)	H: 0-1,500 L: 0-400
Max. twisting torque	Hard: 35 Nm Soft: 25 Nm
Net weight	1.9 kg (4.2 lb)

Includes:
DHP480RFE: Charger, Tool Bag, Battery, Drill Bit, Carrying Case
DHP480Z: Tool Bag, Carrying Case

ICON GUIDE



NHP1300S

ELECTRIC HAMMER DRILL

415



Continuous rating input Capacity

430W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Bit Set

NHP1320S

ELECTRIC HAMMER DRILL

415



Continuous rating input Capacity

450W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip, Depth Rod

8416

ELECTRIC HAMMER DRILL

55



Continuous rating input Capacity

570W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip, Depth Rod

HP1630

ELECTRIC HAMMER DRILL

35



Continuous rating input Capacity

710W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip

HP1630K

ELECTRIC HAMMER DRILL

65



Continuous rating input Capacity

710W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)
Includes: Chuck Key, Side Grip, Assorted Bits (3/8")

HP1640K

ELECTRIC HAMMER DRILL

419



Continuous rating input Capacity

500W
Concrete: 10mm (3/8")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)
Includes: Side Grip, Depth gauge, Chuck Key

8420V

ELECTRIC HAMMER DRILL

105



Continuous rating input Capacity

500W
Concrete: 20mm (3/4")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip, Depth Rod

8419B

2-SPEED ELECTRIC HAMMER DRILL

51



Continuous rating input Capacity

500W
Concrete: 20mm (3/4")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip, Depth Rod

HP2050

2-SPEED ELECTRIC HAMMER DRILL

419



Continuous rating input Capacity

710W
Concrete: 20mm (3/4")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip, Depth Rod

8406

ELECTRIC DIAMOND CORE HAMMER DRILL

105



Continuous rating input Capacity

500W
Concrete: 20mm (3/4")
Steel: 13mm (1/2")
Wood: 16mm (5/8")
Impact per minute (IPM)
No load speed (RPM)
Overall length
Net weight
Power supply cord
2.0m (6.5ft)

Includes: Chuck Key, Side Grip



BRAKE



BUILD-IN JOB LIGHT



CARRYING CASE



DOUBLE INSULATION



KEYLESS CHUCK



MECHANICAL 2 SPEED



REVERSING



TORQUE LIMITER



TORQUE SETTING 15



TORQUE SETTING 21



VARIABLE SPEED

IMPACT DRILLING & DEMOLITION

HR140DWYE1

12V

CORDLESS ROTARY HAMMER



Impact Energy 1.1 J

Capacity

- Concrete: 14mm (5/8")
- Steel: 10mm (3/8")
- Wood: 15mm (1/2")

Impacts Per Minute (IPM) 0-4,500

No Load Speed (RPM) 0-1,000

Stroke Pressure Level 3400(N)

Stroke Power Level 3600(N)

Net weight 1.9-2.0kg (4.3-5.6lb)

Includes: Charger, 2pc Batteries, Carrying case

HR166DWYE1

12V

CORDLESS ROTARY HAMMER



Impact Energy 1.1 J

Capacity

- Concrete: 16mm (5/8")
- Steel: 10mm (3/8")
- Wood: 15mm (1/2")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,000

Dimensions 175x75x114mm (175x150x45.7in)

Net weight 1.9kg (4.3lb)

Includes: Charger, 2pc Batteries, Carrying case

HR166DWYE1: Charger, 2pc Batteries, Carrying case

HR166DZ: Does not come with charger & battery

DHR165RF

18V 43J

CORDLESS ROTARY HAMMER



Impact Energy 1.3 J

Capacity

- Concrete: 16mm (5/8")
- Steel: 12mm (1/2")
- Wood: 24mm (1 1/8")

Impacts Per Minute (IPM) 0-5,500

No Load Speed (RPM) 0-1,800

Dimensions 250x140x250mm (10x5.5x10in)

Net weight 2.2kg (4.8lb)

Includes: Charger, Battery

HR1841F

ELECTRIC ROTARY HAMMER



Impact Energy 1.4 J

Continuous rating input 470W

Capacity

- Concrete (with T.C.T. bit): 18mm (11/16")
- Steel: 12mm (1/2")
- Wood: 24mm (1 1/8")

Impacts Per Minute (IPM) 0-4,500

No Load Speed (RPM) 0-1,300

Power supply cord 2.5m (8.2ft)

Includes: See page 20 for page

HR2020

419

ELECTRIC ROTARY HAMMER

2 Mode



Impact Energy 2.2 (1,028 ft-lb)

Continuous rating input 710W

Capacity

- Concrete: 20mm (3/4")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Overall length 362mm (14.25in)

Net weight 2.3kg (5.1lb)

Power supply cord 2.5m (8.2ft)

Includes: See page 20 for page

HR4002

350

ELECTRIC ROTARY HAMMER

2 Mode



Impact Energy 9.2 (4,578 ft-lb)

Continuous rating input 1,500W

Capacity

- Concrete (with T.C.T. bit): 40mm (1 1/2")
- Concrete (with Core bit): 105mm (4 1/8")
- Impacts Per Minute (IPM): 2,900
- No Load Speed (RPM): 900
- Dimensions: 425x140x250mm (16 3/4"x5 1/2"x10in)
- Net weight: 5.5kg (12.1lb)

Includes: See page 20 for page

HR4030C

350

ELECTRIC ROTARY HAMMER

2 Mode



Impact Energy 2.2 (1,028 ft-lb)

Continuous rating input 1,100W

Capacity

- Concrete (with T.C.T. bit): 40mm (1 1/2")
- Concrete (with Core bit): 118mm (4 5/8")
- Impacts Per Minute (IPM): 1,300-2,000
- No Load Speed (RPM): 700-800
- Dimensions: 412x170x247mm (16 1/8"x6 11/16"x9 3/4")
- Net weight: 5.5kg (12.1lb)

Includes: See page 20 for page

HR5202C

175

ELECTRIC ROTARY HAMMER

2 Mode



Impact Energy 10.12 (4,690 ft-lb)

Continuous rating input 1,510W

Capacity

- Concrete (with T.C.T. bit): 50mm (2in)
- Concrete (with Core bit): 160mm (6 3/8")
- Impacts Per Minute (IPM): 1,100-2,250
- No Load Speed (RPM): 150-300
- Dimensions: 560x134x270mm (22 1/8"x5 1/4"x10 3/4")
- Net weight: 10.8kg (23.8lb)

Includes: See page 20 for page

HR2440

419

ELECTRIC ROTARY HAMMER

2 Mode



Impact Energy 2.2 (1,028 ft-lb)

Continuous rating input 750W

Capacity

- Concrete: 24mm (1 1/8")
- Steel: 15mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Overall length 362mm (14.25in)

Net weight 2.3kg (5.1lb)

Power supply cord 4.0m (13.1ft)

Includes: See page 20 for page

DHR241RFE

DHR241SYE

CORDLESS COMBINATION HAMMER

3 Mode



Impact Energy 1.3 J

Capacity

- Concrete: 20mm (3/4")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Dimensions 417x140x150mm (16 3/8"x5 1/2"x6 in)

Net weight 3.2kg (7.0lb)

Includes: Charger, 2pc Batteries, Carrying case

DHR241RFE: Charger, 2pc Batteries, Carrying case

DHR241SYE: Charger, 2pc Batteries, Carrying case

DHR242Z

18V

CORDLESS COMBINATION HAMMER

3 Mode



Impact Energy 2.1 J

Capacity

- Concrete: 24mm (1 1/8")
- Steel: 13mm (1/2")
- Wood: 27mm (1 1/8")

Impacts Per Minute (IPM) 0-4,500

No Load Speed (RPM) 0-1,200

Stroke Pressure Level 3000(N)

Stroke Power Level 1010(N)

Net weight 2.3kg (5.0lb)

Includes: Charger, Battery & Dual Selection mode and accessory

HR2432

419

ELECTRIC COMBINATION HAMMER

3 Mode



Impact Energy 2.2 (1,028 ft-lb)

Continuous rating input 750W

Capacity

- Concrete: 20mm (3/4")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Net weight 2.3kg (5.0lb)

Power supply cord 4.0m (13.1ft)

Includes: See page 20 for page

HR2470X5

85

ELECTRIC COMBINATION HAMMER

3 Mode



Impact Energy 2.7 (1,236 ft-lb)

Continuous rating input 780W

Capacity

- Concrete: 24mm (1 1/8")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Net weight 2.5kg (5.5lb)

Includes: See page 20 for page

HR2631FX2

125

ELECTRIC COMBINATION HAMMER

3 Mode



Impact Energy 2.4 (1,177 ft-lb)

Continuous rating input 800W

Capacity

- Concrete: 25mm (1")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Net weight 2.9kg (6.4lb)

Includes: See page 20 for page

HR2651

125

ELECTRIC COMBINATION HAMMER

3 Mode



Impact Energy 2.4 (1,177 ft-lb)

Continuous rating input 800W

Capacity

- Concrete: 25mm (1")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Dimensions 380x140x250mm (15x5 1/2"x10in)

Net weight 2.9kg (6.4lb)

Includes: See page 20 for page

HR2810

125

ELECTRIC COMBINATION HAMMER

3 Mode



Impact Energy 2.3 (1,048 ft-lb)

Continuous rating input 800W

Capacity

- Concrete: 20mm (3/4")
- Steel: 13mm (1/2")
- Wood: 32mm (1 1/4")

Impacts per minute (IPM) 0-4,500

No Load speed (RPM) 0-1,200

Dimensions 390x140x250mm (15 3/8"x5 1/2"x10in)

Net weight 2.9kg (6.4lb)

Includes: See page 20 for page

ICON GUIDE

STEEL SHANK

REVERSING

BRAKE

SDS MAX SHANK

BUILD-IN JOB LIGHT

SDS PLUS

CARRYING CASE

SOFT START

CONSTANT SPEED

TORQUE LIMITER

DOUBLE WILLOW

VARIABLE SPEED

DUST COLLECTING



HM1400
ELECTRIC BREAKER

155



HM1812
ELECTRIC BREAKER

218



Impact Energy	28 J
Continuous rating input	1.24 kW
Impact per minute (IPM)	1,200
Sound pressure level	86 dB(A)
Sound power level	113 dB(A)
Overall length	610 mm (24 in)
Net weight	10 kg (22 lb)
Power supply cord	6.0 m (19.7 ft)

Includes: Ball point, Hammer

AVT
SOFT
NO LOAD



Impact Energy	12.0 J (27.9 ft-lb)
Continuous rating input	2.900 W
Impact per minute (IPM)	370
Sound pressure level	90 dB(A)
Sound power level	94 dB(A)
Dimensions	230 mm (9.1 in) x 110 mm (4.3 in) x 110 mm (4.3 in)
Net weight	3.0 kg (6.6 lb)
Power supply cord	5.0 m (16.4 ft)

Includes: Ball point, Hammer, Key, 348472

HM0810TA
ELECTRIC DEMOLITION HAMMER

105

HM1201
ELECTRIC DEMOLITION HAMMER

155



Impact Energy	1.0 J (2.3 ft-lb)
Continuous rating input	50 W
Impact per minute (IPM)	2,100
Sound pressure level	88 dB(A)
Sound power level	121 dB(A)
Overall length	470 mm (18.5 in)
Net weight	6.0 kg (13.2 lb)
Power supply cord	5.0 m (16.4 ft)

Includes: Ball point, Hammer, Bit, 348472



Impact Energy	13.0 J (30.4 ft-lb)
Continuous rating input	1.13 kW
Impact per minute (IPM)	2,100
Overall length	480 mm (19 in)
Net weight	5.1 kg (11.2 lb)
Power supply cord	5.0 m (16.4 ft)

Includes: Ball point, Hammer, Bit, 348472

HM1214C
ELECTRIC DEMOLITION HAMMER

175

AVT
SOFT
NO LOAD



Impact Energy	19 J
Continuous rating input	1.7 kW
Impact per minute (IPM)	550 - 900
Sound pressure level	78 dB(A)
Sound power level	93 dB(A)
Dimensions	230 mm (9.1 in) x 110 mm (4.3 in) x 110 mm (4.3 in)
Net weight	12.0 kg (26.5 lb)
Power supply cord	5.0 m (16.4 ft)

Includes: Ball point, Hammer, Bit, 348472

HM1306
ELECTRIC DEMOLITION HAMMER

204



Impact Energy	21.0 J (21.24 ft-lb)
Continuous rating input	1.5 kW
Impact per minute (IPM)	1,400
Dimensions	230 mm (9.1 in) x 110 mm (4.3 in) x 110 mm (4.3 in)
Net weight	15.1 kg (33.3 lb)
Power supply cord	5.0 m (16.4 ft)

Includes: Ball point, Hammer, Bit, 348472

ICON GUIDE



DJS161Z

78V 430

CORDLESS STRAIGHT SHEAR



Capacity
Steel up to 400 N/mm² 1.6mm
Steel up to 600 N/mm² 1.2mm
Aluminum up to 200 N/mm² 2.5mm
Strokes Per Minute (SPM) 4,000
Dimensions
(L x W x H) 303x70x109mm
(14.1x3.1x4.3in)
Net weight 1.82kg (4.04lb)

TOOL ONLY
Charger & Battery are sold separately.

JS1601

450

ELECTRIC STRAIGHT METAL SHEAR



Continuous rating input 960W
Capacity
Steel up to 400 N/mm² 1.6mm
Steel up to 600 N/mm² 1.2mm
Steel up to 800 N/mm² 0.8mm
Aluminum up to 200 N/mm² 2.5mm
Min. cutting width 25mm (1in)
Strokes per minute (SPM) 4,000
Net weight 1.4kg (3.09lb)
Power supply cord 2.0m (6.5ft)
Includes: Hex wrench, Thickness gauge.

JS1602

450

ELECTRIC METAL SHEAR



Continuous rating input 960W
Capacity
Steel up to 400 N/mm² 1.6mm
Steel up to 600 N/mm² 1.2mm
Steel up to 800 N/mm² 0.8mm
Aluminum up to 200 N/mm² 2.5mm
Min. cutting width 30mm (1.18in)
Strokes per minute (SPM) 4,000
Net weight 1.6kg (3.53lb)
Power supply cord 2.0m (6.5ft)
Includes: Hex wrench.

JS3201

303

ELECTRIC METAL SHEAR



Continuous rating input 710W
Capacity
Steel up to 400 N/mm² 2.0mm
Steel up to 600 N/mm² 2.0mm
Steel up to 800 N/mm² 1.6mm
Aluminum up to 200 N/mm² 4.0mm
Min. cutting width 30mm (1.18in)
Strokes per minute (SPM) 1,000
Net weight 3.4kg (7.50lb)

Includes: Hex wrench, Thickness gauge.

DJN161Z

18V 400

CORDLESS NIBBLER



Capacity
Steel up to 400 N/mm² 1.5mm
Steel up to 600 N/mm² 1.2mm
Aluminum up to 200 N/mm² 2.5mm
Min. cutting width
Outside edge 50mm (2in)
Inside edge 40mm (1.57in)
Strokes Per Minute (SPM) 1,300
Dimensions
(L x W x H) 172x81x110mm (6.77x3.19x4.33in)
Net weight 1.92kg (4.23lb)
TOOL ONLY
Charger & Battery are sold separately.

JN1601

411

ELECTRIC NIBBLER



Continuous rating input 500W
Capacity
Steel up to 400 N/mm² 1.6mm
Steel up to 600 N/mm² 1.2mm
Steel up to 800 N/mm² 0.8mm
Aluminum up to 200 N/mm² 2.5mm
Min. cutting width
Outside edge 50mm (2in)
Inside edge 45mm (1.77in)
Strokes Per Minute (SPM) 2,200
Net weight 1.8kg (3.97lb)
Includes: Hex Wrench.

JN3201

303

ELECTRIC NIBBLER



Continuous rating input 710W
Capacity
Steel up to 400 N/mm² 3.0mm
Steel up to 600 N/mm² 2.5mm
Steel up to 800 N/mm² 1.6mm
Aluminum up to 200 N/mm² 3.5mm
Min. cutting width
Outside edge 120mm (4.72in)
Inside edge 120mm (4.72in)
Strokes Per Minute (SPM) 1,300
Net weight 3.4kg (7.48lb)
Includes: Hex Wrench, Wrench.

DSC250RT

78V

CORDLESS STEEL ROD CUTTER



Blade diameter 19mm (0.75in)
Cutting Capacity 10-25mm (0.39-1in)
Dimensions
(L x W x H) 471x171x179mm
(18.54x6.73x7.05in)
Net weight 3.94kg (8.68lb)

Includes: Charger, Battery.

DCS550Z

18V 440

CORDLESS METAL CUTTER



Blade Diameter 120mm (4.72in)
Max. cutting capacity 50T, 8mm (5/16in)
No Load Speed (RPM) 2,500
Dimensions
(L x W x H) 240x180x100mm
(9.45x7.09x3.94in)
Net weight 2.20kg (4.85lb)

TOOL ONLY
Charger & Battery are sold separately.

4131

303

ELECTRIC METAL CUTTER



Continuous rating input 1,100W
Blade diameter 120mm (4.72in)
Max. cutting capacity 50mm (2in)
No load speed (RPM) 2,000
Overall length 330mm (13in)
Cutting depth 45mm (1.77in)
Net weight 2.5kg (5.51lb)
Power supply cord 2.5m (8.2ft)

Includes: Cutter blade, Hex wrench, Safety glasses.

CA5000X

303

ELECTRIC ALUMINUM GROOVE CUTTER



Continuous rating input 1,300W
Blade type Cutter blade, 10T saw blade
Blade type
Max. cutting capacity
with Guide rail 10mm (7/16in)
with Guide rail 25mm (1in)
with Guide rail 40mm (1.57in)
No Load Speed (RPM) 2,700 (1/2)
Net weight 4.7kg (10.36lb)
Power supply cord 2.5m (8.2ft)

Includes: Cutter blade, Hex wrench.

LC1230

303

ELECTRIC METAL CUTTING SAW



Continuous rating input 1,700W
Blade diameter 305mm (12in)
Max. cutting capacity
at 90° degrees 115mm (4.53in)
at 90° degrees 150mm (5.91in)
at 45° degrees 80mm (3.15in)
at 45° degrees 100mm (3.94in)
No load speed (RPM) 1,300
Net weight 15.5kg (34.26lb)
Power supply cord 2.5m (8.2ft)
Includes: Guide rail, Saw blade, Hex wrench, Safety glasses.

2414NB

303

ELECTRIC PORTABLE CUT-OFF



Continuous rating input 2,000W
Wheel diameter 305mm (12in)
Hole dia. 204mm (8in)
No load speed (RPM) 9,800
Dimensions
(L x W x H) 600x280x500mm
(23.6x11.0x19.7in)
Net weight 18.4kg (40.6lb)
Power supply cord 2.0m (6.5ft)

Includes: Blade, Hex wrench, Safety glasses.

2414

153

ELECTRIC PORTABLE CUT-OFF



Continuous rating input 2,000W
Wheel diameter 305mm (12in)
Hole dia. 204mm (8in)
No load speed (RPM) 9,800
Dimensions
(L x W x H) 600x280x500mm
(23.6x11.0x19.7in)
Net weight 15.2kg (33.6lb)
Power supply cord 2.5m (8.2ft)

Includes: Blade, Hex wrench, Safety glasses.

2416S

153

ELECTRIC PORTABLE CUT-OFF



Continuous rating input 1,400W
Wheel diameter 406mm (16in)
Hole dia. 254mm (10in)
No load speed (RPM) 7,000
Dimensions
(L x W x H) 610x280x500mm
(24.0x11.0x19.7in)
Net weight 15.2kg (33.6lb)
Power supply cord 2.5m (8.2ft)

Includes: Blade, Hex wrench, Safety glasses.

2107FK


303

ELECTRIC PORTABLE BAND SAW



Continuous rating input 1,700W
Capacity
Blade width 120mm (4.72in)
Blade setting for workpiece 120mm x 120mm
(4.72in x 4.72in)
Dimensions
(L x W x H) 530x160x280mm
(20.9x6.3x11.0in)
Net weight 5.2kg (11.46lb)
Power supply cord 2.5m (8.2ft)

Includes: Guide rail, Blade, Hex wrench, Safety glasses.



JV101DWYE

JV101DZ

CORDLESS JIG SAW



Max Cutting Capacity
at 90° degrees:

12V

Wood: 65mm (2-5/16")
Aluminum: 4mm (5/32")
Mild Steel: 2mm (5/64")
18mm (3/4")
0-2 A/C
230V/60Hz/1500mm
(9-1/8" x 23" x 34")
Net weight:
1.8-1.3 kg (3.9-2.9 lbs)

Includes:
JV101DWYE: Charger, Two Batteries, Jig Saw Blade, Hex wrench, Guide rail
JV101DZ: Does not come with charger & battery

4300BV

ELECTRIC JIG SAW

JV103DZ

CORDLESS JIG SAW

12V



Length of stroke
Max cutting capacity

Wood: 65mm (2-5/16")
Steel: 10mm (3/8")
Aluminum: 20mm (13/16")
Strokes per minute (SPM):
600-2,300
Net weight:
2.0kg (4.4 lbs)

TOOL ONLY
Charger & Battery are sold separately.

4326M

ELECTRIC JIG SAW

DJV180Z

CORDLESS JIG SAW

18V 440



Length of stroke
Max cutting capacity

Wood: 135mm (5-3/16")
10mm (3/8")
0-2 A/C
Strokes per minute (SPM):
250-770 (30mm)
(10-12" x 23" x 37")
2.7-5.6 kg (6.0-12.3 lbs)

TOOL ONLY
Charger & Battery are sold separately.

DJV182RF

CORDLESS JIG SAW

18V



Capacity
Steel
Wood

10mm (3/8")
135mm (5-3/16")
25mm (1")
600-2,300
230V/60Hz/30mm
(9-1/8" x 23" x 34")
2.4-2.7 kg (5.2-5.9 lbs)

Includes:
DJV182RF: Charger, Two Batteries, Jig Saw Blade, Hex wrench, Guide rail
DJV182Z: Does not come with charger & battery

4327M

ELECTRIC JIG SAW



Continuous rating input
Capacity

350W
Wood: 65 mm (2-5/16")
Steel: 5 mm (1/4")
25 mm (1")
0-2,100
230mm (9-1/8")
2.0kg (4.4 lbs)
2.0V (12.2")

Includes: Jig saw blade set (No. 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000, 1001, 1002, 1003, 1004, 1005, 1006, 1007, 1008, 1009, 1010, 1011, 1012, 1013, 1014, 1015, 1016, 1017, 1018, 1019, 1020, 1021, 1022, 1023, 1024, 1025, 1026, 1027, 1028, 1029, 1030, 1031, 1032, 1033, 1034, 1035, 1036, 1037, 1038, 1039, 1040, 1041, 1042, 1043, 1044, 1045, 1046, 1047, 1048, 1049, 1050, 1051, 1052, 1053, 1054, 1055, 1056, 1057, 1058, 1059, 1060, 1061, 1062, 1063, 1064, 1065, 1066, 1067, 1068, 1069, 1070, 1071, 1072, 1073, 1074, 1075, 1076, 1077, 1078, 1079, 1080, 1081, 1082, 1083, 1084, 1085, 1086, 1087, 1088, 1089, 1090, 1091, 1092, 1093, 1094, 1095, 1096, 1097, 1098, 1099, 1100, 1101, 1102, 1103, 1104, 1105, 1106, 1107, 1108, 1109, 1110, 1111, 1112, 1113, 1114, 1115, 1116, 1117, 1118, 1119, 1120, 1121, 1122, 1123, 1124, 1125, 1126, 1127, 1128, 1129, 1130, 1131, 1132, 1133, 1134, 1135, 1136, 1137, 1138, 1139, 1140, 1141, 1142, 1143, 1144, 1145, 1146, 1147, 1148, 1149, 1150, 1151, 1152, 1153, 1154, 1155, 1156, 1157, 1158, 1159, 1160, 1161, 1162, 1163, 1164, 1165, 1166, 1167, 1168, 1169, 1170, 1171, 1172, 1173, 1174, 1175, 1176, 1177, 1178, 1179, 1180, 1181, 1182, 1183, 1184, 1185, 1186, 1187, 1188, 1189, 1190, 1191, 1192, 1193, 1194, 1195, 1196, 1197, 1198, 1199, 1200, 1201, 1202, 1203, 1204, 1205, 1206, 1207, 1208, 1209, 1210, 1211, 1212, 1213, 1214, 1215, 1216, 1217, 1218, 1219, 1220, 1221, 1222, 1223, 1224, 1225, 1226, 1227, 1228, 1229, 1230, 1231, 1232, 1233, 1234, 1235, 1236, 1237, 1238, 1239, 1240, 1241, 1242, 1243, 1244, 1245, 1246, 1247, 1248, 1249, 1250, 1251, 1252, 1253, 1254, 1255, 1256, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1267, 1268, 1269, 1270, 1271, 1272, 1273, 1274, 1275, 1276, 1277, 1278, 1279, 1280, 1281, 1282, 1283, 1284, 1285, 1286, 1287, 1288, 1289, 1290, 1291, 1292, 1293, 1294, 1295, 1296, 1297, 1298, 1299, 1300, 1301, 1302, 1303, 1304, 1305, 1306, 1307, 1308, 1309, 1310, 1311, 1312, 1313, 1314, 1315, 1316, 1317, 1318, 1319, 1320, 1321, 1322, 1323, 1324, 1325, 1326, 1327, 1328, 1329, 1330, 1331, 1332, 1333, 1334, 1335, 1336, 1337, 1338, 1339, 1340, 1341, 1342, 1343, 1344, 1345, 1346, 1347, 1348, 1349, 1350, 1351, 1352, 1353, 1354, 1355, 1356, 1357, 1358, 1359, 1360, 1361, 1362, 1363, 1364, 1365, 1366, 1367, 1368, 1369, 1370, 1371, 1372, 1373, 1374, 1375, 1376, 1377, 1378, 1379, 1380, 1381, 1382, 1383, 1384, 1385, 1386, 1387, 1388, 1389, 1390, 1391, 1392, 1393, 1394, 1395, 1396, 1397, 1398, 1399, 1400, 1401, 1402, 1403, 1404, 1405, 1406, 1407, 1408, 1409, 1410, 1411, 1412, 1413, 1414, 1415, 1416, 1417, 1418, 1419, 1420, 1421, 1422, 1423, 1424, 1425, 1426, 1427, 1428, 1429, 1430, 1431, 1432, 1433, 1434, 1435, 1436, 1437, 1438, 1439, 1440, 1441, 1442, 1443, 1444, 1445, 1446, 1447, 1448, 1449, 1450, 1451, 1452, 1453, 1454, 1455, 1456, 1457, 1458, 1459, 1460, 1461, 1462, 1463, 1464, 1465, 1466, 1467, 1468, 1469, 1470, 1471, 1472, 1473, 1474, 1475, 1476, 1477, 1478, 1479, 1480, 1481, 1482, 1483, 1484, 1485, 1486, 1487, 1488, 1489, 1490, 1491, 1492, 1493, 1494, 1495, 1496, 1497, 1498, 1499, 1500, 1501, 1502, 1503, 1504, 1505, 1506, 1507, 1508, 1509, 1510, 1511, 1512, 1513, 1514, 1515, 1516, 1517, 1518, 1519, 1520, 1521, 1522, 1523, 1524, 1525, 1526, 1527, 1528, 1529, 1530, 1531, 1532, 1533, 1534, 1535, 1536, 1537, 1538, 1539, 1540, 1541, 1542, 1543, 1544, 1545, 1546, 1547, 1548, 1549, 1550, 1551, 1552, 1553, 1554, 1555, 1556, 1557, 1558, 1559, 1560, 1561, 1562, 1563, 1564, 1565, 1566, 1567, 1568, 1569, 1570, 1571, 1572, 1573, 1574, 1575, 1576, 1577, 1578, 1579, 1580, 1581, 1582, 1583, 1584, 1585, 1586, 1587, 1588, 1589, 1590, 1591, 1592, 1593, 1594, 1595, 1596, 1597, 1598, 1599, 1600, 1601, 1602, 1603, 1604, 1605, 1606, 1607, 1608, 1609, 1610, 1611, 1612, 1613, 1614, 1615, 1616, 1617, 1618, 1619, 1620, 1621, 1622, 1623, 1624, 1625, 1626, 1627, 1628, 1629, 1630, 1631, 1632, 1633, 1634, 1635, 1636, 1637, 1638, 1639, 1640, 1641, 1642, 1643, 1644, 1645, 1646, 1647, 1648, 1649, 1650, 1651, 1652, 1653, 1654, 1655, 1656, 1657, 1658, 1659, 1660, 1661, 1662, 1663, 1664, 1665, 1666, 1667, 1668, 1669, 1670, 1671, 1672, 1673, 1674, 1675, 1676, 1677, 1678, 1679, 1680, 1681, 1682, 1683, 1684, 1685, 1686, 1687, 1688, 1689, 1690, 1691, 1692, 1693, 1694, 1695, 1696, 1697, 1698, 1699, 1700, 1701, 1702, 1703, 1704, 1705, 1706, 1707, 1708, 1709, 1710, 1711, 1712, 1713, 1714, 1715, 1716, 1717, 1718, 1719, 1720, 1721, 1722, 1723, 1724, 1725, 1726, 1727, 1728, 1729, 1730, 1731, 1732, 1733, 1734, 1735, 1736, 1737, 1738, 1739, 1740, 1741, 1742, 1743, 1744, 1745, 1746, 1747, 1748, 1749, 1750, 1751, 1752, 1753, 1754, 1755, 1756, 1757, 1758, 1759, 1760, 1761, 1762, 1763, 1764, 1765, 1766, 1767, 1768, 1769, 1770, 1771, 1772, 1773, 1774, 1775, 1776, 1777, 1778, 1779, 1780, 1781, 1782, 1783, 1784, 1785, 1786, 1787, 1788, 1789, 1790, 1791, 1792, 1793, 1794, 1795, 1796, 1797, 1798, 1799, 1800, 1801, 1802, 1803, 1804, 1805, 1806, 1807, 1808, 1809, 1810, 1811, 1812, 1813, 1814, 1815, 1816, 1817, 1818, 1819, 1820, 1821, 1822, 1823, 1824, 1825, 1826, 1827, 1828, 1829, 1830, 1831, 1832, 1833, 1834, 1835, 1836, 1837, 1838, 1839, 1840, 1841, 1842, 1843, 1844, 1845, 1846, 1847, 1848, 1849, 1850, 1851, 1852, 1853, 1854, 1855, 1856, 1857, 1858, 1859, 1860, 1861, 1862, 1863, 1864, 1865, 1866, 1867, 1868, 1869, 1870, 1871, 1872, 1873, 1874, 1875, 1876, 1877, 1878, 1879, 1880, 1881, 1882, 1883, 1884,

MULTI TOOL

Cutting, Plunge Cutting, Sanding, Removing grout, & Scraping.

TM30DWYE

ELECTRIC MULTI TOOL

12V



Oscillations per minute (OPM) 8,000 - 20,000
 Oscillation Angle
 1.6°
 1.7°
 Total 3.3°
 Max output
 170W
 Net weight
 1.1-1.2kg (2.3-2.6 lbs)

Includes: Charger, 2pcs Battery, Hex wrench

DTM50Z

CORDLESS MULTI TOOL

18V



Oscillations per minute (OPM) 8,000-20,000
 Dimensions
 207x80x122mm
 (8.15x3.15x4.80in)
 Net weight
 1.8-2.2kg (3.9-4.8 lbs)

TOOL ONLY
 Charger & Battery are sold separately

TM3000CX1

ELECTRIC MULTI TOOL

450



Continuous rating Input
 8,000-20,000
 Oscillations per minute (OPM)
 Dimensions
 275x84x122mm
 (10.8x3.3x4.8in)
 Net weight
 1.4-1.5kg (3.1-3.3 lbs)
 Power supply cord
 5.0m (16.4ft)

Includes: Sanding Pad, Segment Saw Blade P1, Plunge Cut Saw Blade P1, Hex Wrench

Multi Angle Setting

Full 300° multi angle setting enables users to position accessories in 12 different angles (each 30°) to allow access to tight spaces for optimum maneuverability.



Removing metal tile adhesive



Routing joints on wall tiles



Sanding and polishing various materials



Cutting plasterboard



Cutting PVC, FRP pipes



Flush cutting of nails



SJ401

ELECTRIC SCROLL SAW



Continuous rating Input
 90W
 Capacity
 50mm (2")
 Thickness of cut
 40mm (1.6")
 Stroke
 17mm (0.67")
 Length of stroke
 400mm (15.7")
 Oscillations per minute (OPM)
 400mm (15.7")
 Overall length
 400mm (15.7")
 Net weight
 1.4kg (3.07 lbs)

Includes: Saw blade of 16in length, Blade clamping rod

DSS611RF

DSS611Z

CORDLESS CIRCULAR SAW



Blade Diameter
 185mm (7.28")
 Max Cutting Capacity
 at 90° degrees
 57mm (2.24")
 at 45° degrees
 40mm (1.57")
 at 30° degrees
 30mm (1.18")
 No Load Speed (RPM)
 3,000
 Dimensions
 347x235x85mm
 (13.6x9.3x3.3in)
 Net weight
 2.9-3.2kg (6.4-7.1 lbs)

Includes:
 DSS611RF: Charger, 1pc Battery, Carry case.
 DSS611Z: Saw blade and charger & battery.

DHS710Z

CORDLESS CIRCULAR SAW

18V

442



Blade Diameter
 190/185mm (7.5/7.3in)
 Max Cutting Capacity
 at 90° degrees
 58.5/48.5mm (2.3/1.9in)
 at 45° degrees
 42/32.5mm (1.65/1.28in)
 at 30° degrees
 31/22.5mm (1.24/0.89in)
 No Load Speed (RPM)
 4,000
 Dimensions
 396x217x236mm
 (15.6x8.5x9.3in)
 Net weight
 4.5-4.8kg (9.9-10.6 lbs)

TOOL ONLY
 Charger & Battery are sold separately.



5606B

ELECTRIC CIRCULAR SAW

300



Continuous rating input	900W
Max cutting capacity	
at 90° degrees:	66mm (2-1/8")
at 45° degrees:	38mm (1-1/2")
Blade diameter	180mm (7-1/8")
No load speed (RPM)	5,200
Overall length	268mm (10-9/16")
Net weight	3.1kg (6.8lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Hex wrench, Rip fence (guide rail)

SP6000

ELECTRIC CIRCULAR SAW

300



Continuous rating input	1,200W
Blade diameter	185mm (7-1/2")
Max cutting capacity	
at 90° degrees:	65mm (2-1/2")
at 45° degrees:	43mm (1-3/4")
at 48° degrees:	38mm (1-1/2")
No load speed (RPM)	7,000 (3,600)
Net weight	4.1kg (9lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Hex wrench

HS7010

ELECTRIC CIRCULAR SAW

300



Continuous rating input	1,500W
Max cutting capacity	
at 90° degrees:	65-67mm (2-1/2" - 2-5/8")
at 45° degrees:	44-46mm (1-3/4" - 1-3/4")
Blade diameter	175-182mm (7-1/8" - 7-1/2")
No load speed (RPM)	5,500
Dimensions (L x W x H)	300x240x260mm
Net weight	4.3kg (9.5lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Hex wrench, Rip fence (guide rail)

5806B

ELECTRIC CIRCULAR SAW

300



Continuous rating input	1,350W
Max cutting capacity	
at 90° degrees:	66mm (2-5/8")
at 45° degrees:	44mm (1-11/16")
Blade diameter	185mm (7-1/4")
No load speed (RPM)	5,200
Overall length	262mm (10-3/8")
Net weight	3.9kg (7.6lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Hex wrench, Rip fence (guide rail)

5008MG

ELECTRIC CIRCULAR SAW

150



Continuous rating input	1,300W
Max cutting capacity	
at 90°:	75.5mm (3")
at 45°:	57mm (2-1/4")
at 50°:	51.5mm (2")
Blade diameter	210mm (8-1/4")
No load speed (RPM)	5,200
Dimensions (L x W x H)	332x243x277mm
Net weight	4.9kg (10.8lb)
Power supply cord	2.5m (8.2ft)

Includes: TCT saw blade, Hex wrench, Rip fence (guide rail)

N5900B

ELECTRIC CIRCULAR SAW

150



Continuous rating input	2,000W
Max cutting capacity	
at 90° degrees:	85mm (3-3/8")
at 45° degrees:	60mm (2-3/8")
at 50° degrees:	52mm (2-1/2")
Blade diameter	225mm (9-1/8")
No load speed (RPM)	4,100
Overall length	360mm (14")
Net weight	8.8kg (19.4lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Wrench, Rip fence (guide rail)

5201N

ELECTRIC CIRCULAR SAW

150



Continuous rating input	1,750W
Max cutting capacity	
at 90° degrees:	80mm (3-1/8")
at 45° degrees:	50mm (2-1/8")
Blade diameter	200mm (8-1/8")
No load speed (RPM)	1,700
Overall length	440mm (17-3/8")
Net weight	7.8kg (17.2lb)
Power supply cord	5.0m (16.4ft)

Includes: Combination saw blade, Wrench, Hex wrench, Rip fence (guide rail)

5103N

ELECTRIC CIRCULAR SAW

150



Continuous rating input	1,750W
Max cutting capacity	
at 90° degrees:	128mm (5")
at 45° degrees:	81mm (3-1/8")
Blade diameter	305mm (12-1/8")
No load speed (RPM)	2,300
Overall length	360mm (14-1/8")
Net weight	8.9kg (19.6lb)
Power supply cord	5.0m (16.4ft)

Includes: Combination saw blade, Wrench, Hex wrench, Rip fence (guide rail)

LS1018L

ELECTRIC SLIDE COMPOUND MITER SAW

150



Continuous rating input	1,000W
Max cutting capacity	
at 90° degrees:	31 x 635mm (3-5/8" x 25")
at 45° degrees:	21 x 610mm (3-5/8" x 24")
at 48° degrees:	25 x 580mm (1" x 23-1/4")
Blade diameter	410mm
No load speed (RPM)	3,000
Dimensions (L x W x H)	355x230x533mm
Net weight	20.8kg (45.8lb)
Power supply cord	2.5m (8.2ft)

Includes: TCT saw blade, Detachable fence, Hex wrench, Dust bag, Filter assembly

LS1219L

ELECTRIC SLIDE COMPOUND MITER SAW

150



Continuous rating input	1,000W
Max cutting capacity	
Blade diameter	305mm (12")
Max Angle	0° to 55° Right, 0° to 45° Left
Blade Angle	0° to 55° Right, 0° to 45° Left
Max Cutting Capacity	
at 90° degrees:	107x363mm (4-1/4" x 14-1/2")
at 45° degrees:	107x255mm (4-1/4" x 10")
No load speed (RPM)	3,200
Net weight	26.3kg (58.0lb)
Power supply cord	2.0m (6.6ft)

Includes: Blade guard, Dust bag, Hex wrench, Hex key, Triangle file

LS1040

ELECTRIC COMPOUND MITER SAW

150



Continuous rating input	1,000W
Max cutting capacity	
at 90° degrees:	33.5x55mm (1-3/8" x 2-1/4")
at 45° degrees:	21.5x55mm (1-3/8" x 2-1/4")
Blade diameter	200mm (8-1/8")
No load speed (RPM)	4,500
Dimensions (L x W x H)	530x270x532mm
Net weight	12.4kg (27.3lb)
Power supply cord	2.5m (8.2ft)

Includes: Blade guard, Dust bag, Hex wrench, Hex key, Triangle file

LS1221

ELECTRIC COMPOUND MITER SAW

150



Continuous rating input	1,000W
Max cutting capacity	
at 90° degrees:	36x152mm (1-3/8" x 6")
at 45° degrees:	26x143mm (1-3/8" x 5-3/4")
Blade diameter	200mm (8-1/8")
No load speed (RPM)	4,500
Dimensions (L x W x H)	574x270x532mm
Net weight	22.1kg (48.7lb)
Power supply cord	2.5m (8.2ft)

Includes: Carbide tipped saw blade, Hex wrench, Hex key, Triangle file

LS1440

ELECTRIC MITER SAW

150



Continuous rating input	1,000W
Max cutting capacity	
at 90° degrees:	122x152mm (4-13/16" x 6")
at 45° degrees:	122x116mm (4-13/16" x 4-1/2")
Blade diameter	200mm (8-1/8")
No load speed (RPM)	4,500
Dimensions (L x W x H)	510x260x532mm
Net weight	34.2kg (75.4lb)
Power supply cord	2.5m (8.2ft)

Includes: Blade guard, Hex wrench, Hex key, Triangle file

MLT100

ELECTRIC TABLE SAW

150



Continuous rating input	1,000W
Max cutting capacity	
at 90° degrees:	41mm (1-5/8")
at 45° degrees:	40mm (1-5/8")
Blade diameter	200mm (8-1/8")
No load speed (RPM)	4,500
Dimensions (L x W x H)	725x530x532mm
Net weight	24.1kg (53.0lb)
Power supply cord	2.5m (8.2ft)

Includes: TCT saw blade, Rip fence, Hex wrench, Hex key, Triangle file


DGA402RF 18V 410
 CORDLESS ANGLE GRINDER


Wheel Diameter: 100mm (4")
 No-load speed (RPM): 11,000
 Dimensions (L x W x H): 210 x 100 x 100mm
 Overall length: 210mm (8 1/4")
 Net weight: 1.55kg (3.42lb)

Includes: Cartridge battery, Depressed center wheel, Lock nut, wrench.


DGA406Z 18V
 CORDLESS ANGLE GRINDER


Wheel Diameter: 100mm (4")
 No-load speed (RPM): 8,500
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 2.1kg (4.63lb)

Includes: Cartridge battery, Depressed center wheel, Lock nut, wrench.


9553BKX
9553B
 ELECTRIC ANGLE GRINDER


Continuous duty input: 710W
 Wheel diameter: 100mm (4")
 No-load speed (RPM): 11,100
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 1.21kg (2.67lb)
 Power supply cord: 2.5m (8.2ft)
 Spindle: 12mm (1/2")

Includes: Depressed center wheel, Diamond disc, Slip, Lock nut, wrench.

9556HN 125
 ELECTRIC ANGLE GRINDER


Continuous duty input: 840W
 Wheel diameter: 100mm (4")
 No-load speed (RPM): 11,300
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 1.8kg (3.97lb)
 Power supply cord: 2.5m (8.2ft)

Includes: Depressed center wheel, Diamond disc, Slip, Lock nut, wrench.

9500NB 411
 ELECTRIC ANGLE GRINDER


Continuous duty input: 200W
 Wheel diameter: 100mm (4")
 No-load speed (RPM): 12,300
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 1.6kg (3.53lb)
 Power supply cord: 2.0m (6.6ft)

Includes: Depressed center wheel, Lock nut, wrench.

N9500N 411
 ELECTRIC ANGLE GRINDER


Continuous duty input: 200W
 Wheel diameter: 100mm (4")
 No-load speed (RPM): 12,300
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 1.6kg (3.53lb)
 Power supply cord: 2.0m (6.6ft)

Includes: Depressed center wheel, Lock nut, wrench.

9520B 411
 ELECTRIC ANGLE GRINDER


Continuous duty input: 770W
 Wheel diameter: 100mm (4")
 No-load speed (RPM): 11,000
 Dimensions (L x W x H): 260 x 110 x 140mm
 Overall length: 260mm (10 1/4")
 Net weight: 1.8kg (3.97lb)
 Power supply cord: 2.5m (8.2ft)

Includes: Depressed center wheel, Lock nut, wrench.

9533
ELECTRIC ANGLE GRINDER

411



Continuous rating input 750W
Wheel diameter 125mm (5")
No load speed (RPM) 11,000
Net weight 1.4kg (3.1lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

9556PB
ELECTRIC ANGLE GRINDER

325



Continuous rating input 840W
Wheel diameter 125mm (5")
No load speed (RPM) 11,000
Dimensions (L x W x H) 172x112x107mm
(6.8x4.4x4.2")
Net weight 2.3kg (5.0lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

9557HN / NB
ELECTRIC ANGLE GRINDER

325



Continuous rating input 840W
Wheel diameter 125mm (5")
No load speed (RPM) 11,000
Net weight 1.7kg (3.7lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Depressed back, Grip, Lock nut wrench.

9558HN / NB
ELECTRIC ANGLE GRINDER

325



Continuous rating input 840W
Wheel diameter 125mm (5")
No load speed (RPM) 11,000
Dimensions (L x W x H) 172x112x107mm
(6.8x4.4x4.2")
Net weight 1.7-2.0kg (3.8-4.4lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

9005N
ELECTRIC ANGLE GRINDER

100



Continuous rating input 1,000W
Wheel diameter 125mm (5")
No load speed (RPM) 11,000
Overall length 390mm (15")
Net weight 2.5kg (5.5lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

GA5020
ELECTRIC ANGLE GRINDER

303



Continuous rating input 1,350W
Wheel diameter 125mm (5")
No load speed (RPM) 12,000
Dimensions (L x W x H) 350x130x120mm
(13.8x5.1x4.7")
Net weight 2.7-3.0kg (6.0-6.6lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

GA6020
ELECTRIC ANGLE GRINDER

303



Continuous rating input 1,000W
Wheel diameter 150mm (6")
No load speed (RPM) 11,000
Dimensions (L x W x H) 350x130x120mm
(13.8x5.1x4.7")
Net weight 2.6-3.2kg (5.7-7.1lbs)
Power supply cord 2.5m (8.2ft)

Includes: Depressed center wheel, Grip, Lock nut wrench.

GA7020
ELECTRIC ANGLE GRINDER

204



Continuous rating input 2,000W
Wheel diameter 150mm (6")
No load speed (RPM) 8,500
Dimensions (L x W x H) 475x200x140mm
(18.7x7.9x5.5")
Net weight 5.5-5.9kg (12.2-13.0lbs)
Power supply cord 2.5m (8.2ft)

Includes: Lock nut wrench, Side grip.

GA7050
ELECTRIC ANGLE GRINDER

204



Continuous rating input 2,000W
Wheel diameter 150mm (6")
No load speed (RPM) 8,500
Dimensions (L x W x H) 475x200x130mm
(18.7x7.9x5.1")
Net weight 5.6-6.0kg (12.3-13.2lbs)
Power supply cord 2.5m (8.2ft)

Includes: Grip, Lock nut wrench.

GA7001
ELECTRIC ANGLE GRINDER

153



Continuous rating input 2,000W
Wheel diameter 150mm (6")
No load speed (RPM) 8,000
Overall length 415mm (16.3")
Net weight 5.1kg (11.2lbs)
Power supply cord 2.5m (8.2ft)

Includes: Lock nut wrench.

GA7001L
ELECTRIC ANGLE GRINDER

153



Continuous rating input 2,000W
Wheel diameter 150mm (6")
No load speed (RPM) 8,000
Overall length 411mm (16.1")
Net weight 5.1kg (11.2lbs)
Power supply cord 2.5m (8.2ft)

Includes: Lock nut wrench.

GA9020
ELECTRIC ANGLE GRINDER

204



Continuous rating input 1,500W
Wheel diameter 125mm (5")
No load speed (RPM) 8,500
Dimensions (L x W x H) 475x130x140mm
(18.7x5.1x5.5")
Net weight 0.75-0.85kg (1.7-1.9lbs)
Power supply cord 2.5m (8.2ft)

Includes: Grip, Lock nut wrench.

9105

ELECTRIC STRAIGHT GRINDER

151



Continuous rating input
Wattage
Capacity
No load speed (RPM)
Overall length
Net weight
Power supply cord

500W
18mm (7")
17mm (13")
1,800
330mm (21-5/8")
5.7kg (12.5lb)
2.5m (8.2ft)

Includes: Grinding wheel, Guard.

GS5000

ELECTRIC STRAIGHT GRINDER

204



Continuous rating input
Wattage
Wet Diameter
Wet Length
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight
Power supply cord

200W
25mm (1")
12.7, 20mm (1/2, 3/4")
5,000
260x180x110mm
(10-1/4"x7-1/8"x4-3/8")
5.0 (11.0lb)
2.0m (6.6ft)

Includes: Grinding wheel, Guard, Safety key, Hand switch, Vibration.

GB602W

ELECTRIC BENCH GRINDER



Continuous rating input
Wattage
Wet Diameter
Wet Length
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight

200W
100mm (4")
6.4mm (1/4") x 19mm (3/8")
15,000 (14,000)
115
270x100x160mm (10-5/8"x4-3/8"x6-3/8")
270x90x120mm
(10-5/8"x3-5/8"x4-3/8")
5.2x4.5kg (11.5x9.9lb)

Includes: Flywheel, Grinding wheel.

GB801

ELECTRIC BENCH GRINDER



Continuous rating input
Wattage
Wet Diameter
Wet Length
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight

250W
225mm (9")
19mm (3/4")
15,000 (14,000)
115
270x100x160mm (10-5/8"x4-3/8"x6-3/8")
270x90x120mm
(10-5/8"x3-5/8"x4-3/8")
5.2x4.5kg (11.5x9.9lb)

Includes: Flywheel, Grinding wheel.

DGD800Z

CORDLESS DIE GRINDER

18V 410



Capacity
Wet Diameter
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight

Grind 3mm (1/8")
25mm (1-1/2")
24,000
425x60x110mm
(16-3/4"x2-3/8"x4-3/8")
1.7 (3.7lb)

Includes: Battery, Charger & Safety key and security.

906H

ELECTRIC DIE GRINDER

15



Continuous rating input
Capacity
No load speed (RPM)
Overall length
Net weight
Power supply cord

300W
Grind 3mm (1/8")
27,000
300mm (12")
1.3kg (2.9lb)
2.5m (8.2ft)

Includes: Work bit.

GD0601

ELECTRIC DIE GRINDER

325



Continuous rating input
Capacity
Wet Diameter
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight
Power supply cord

400W
Grind 3mm (1/8")
30mm (1-1/8")
25,000
260x60x50mm
(10-1/8"x2-3/8"x2-1/8")
1.65x1.4kg (3.6x3.1lb)
2.5m (8.2ft)

Includes: Work bit.

GD0603

ELECTRIC DIE GRINDER

51



Continuous rating input
Capacity
Wet Diameter
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight
Power supply cord
Includes: Safety key and security.

340W
Grind 3mm (1/8")
15mm (3/4")
28,000
180mm
200mm
280x60x70mm
(11-1/8"x2-3/8"x2-7/8")
0.68kg (1.5lb)
2.5m (8.2ft)

PW5001C

ELECTRIC STRAIGHT POLISHER

218



Continuous rating input
Capacity
No load speed (RPM)
Overall length
Net weight
Power supply cord

900W
Poli: 10-100mm (4-4")
2,000 (4,000)
350mm (14-1/8")
2.5x2.8kg (5.5x6.2lb)
4.1m (13.5ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

9227C

ELECTRIC SANDER - POLISHER

301



Continuous rating input
Wet Diameter
Wet Length
No Load Speed (RPM)
Overall length
Net weight
Power supply cord

1,500W
180mm (7")
190mm (7")
5,000
470mm (18-1/2")
3.2kg (7.0lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

9218PB

ELECTRIC SANDER - POLISHER

101



Continuous rating input
Wet Diameter
No load speed (RPM)
Overall length
Net weight
Power supply cord

570W
180mm (7")
2,000
220mm (8-11/16")
2.7kg (5.9lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

9218PBL

ELECTRIC SANDER - POLISHER

100



Continuous rating input
Wet Diameter
No load speed (RPM)
Overall length
Net weight
Power supply cord

900W
180mm (7")
1,400
220mm (8-11/16")
2.7kg (5.9lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

9207SPB

ELECTRIC SANDER - POLISHER

100



Continuous rating input
Wet Diameter
No load speed (RPM)
Overall length
Net weight
Power supply cord

1,000W
180mm (7")
1,400
450mm (17-3/4")
4.1kg (9.0lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

SA7000C

ELECTRIC SANDER - POLISHER

204



Continuous rating input
Wet Diameter
Wet Length
No Load Speed (RPM)
Dimensions
(L x W x H)
Net weight
Power supply cord

1,500W
180mm (7")
190mm (7")
5,000
470x170x130mm
(18-1/2"x6-3/4"x5-1/8")
3.2x3.4kg (7.0x7.5lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

9218SB

ELECTRIC DISC SANDER

100



Continuous rating input
Wet Diameter
Wet Length
No Load Speed (RPM)
Overall length
Net weight
Power supply cord

570W
180mm (7")
190mm (7")
4,000
220mm (8-11/16")
2.7kg (5.9lb)
2.5m (8.2ft)

Includes: Polishing pad, Safety key, Hand switch, Vibration.

BO4510H

419

ELECTRIC FINISHING SANDER



Continuous running input	170W
Red size	110x100mm (4.33x3.94")
abrasive paper size	110x140mm (4.33x5.51")
Orbits per minute (OPM)	12,000
Dimensions (L x W x H)	110x110x55mm
Net weight	2.4kg (5.29lb)
Power supply cord	2.5m (8.2ft)

Includes: Abrasive paper, Dust bag

BO4556

419

ELECTRIC FINISHING SANDER



Continuous running input	200W
Red size	110x100mm (4.33x3.94")
abrasive paper size	110x140mm (4.33x5.51")
Orbits per minute (OPM)	14,000
Dimensions (L x W x H)	110x110x55mm
Net weight	2.4kg (5.29lb)
Power supply cord	2.5m (8.2ft)

Includes: Abrasive paper, Dust bag, Patch pad

BO3700

64

ELECTRIC FINISHING SANDER



Continuous running input	100W
Red size	80x60mm (3.15x2.36")
abrasive paper size	80x120mm (3.15x4.72")
Orbits per minute (OPM)	10,000
Overall length	250mm (9.84")
Net weight	1.4kg (3.09lb)
Power supply cord	7.5m (24.6ft)

Includes: Abrasive paper, Dust bag, Patch pad

BO4901

419

ELECTRIC FINISHING SANDER



Continuous running input	300W
Red size	110x65mm (4.33x2.56")
abrasive paper size	110x100mm (4.33x3.94")
Orbits per minute (OPM)	10,000
Overall length	260mm (10.24")
Net weight	2.3kg (5.07lb)
Power supply cord	2.5m (8.2ft)

Includes: Abrasive paper

9045B

100

ELECTRIC FINISHING SANDER



Continuous running input	300W
Red size	110x65mm (4.33x2.56")
abrasive paper size	110x100mm (4.33x3.94")
Orbits per minute (OPM)	10,000
Overall length	260mm (10.24")
Net weight	2.3kg (5.07lb)
Power supply cord	7.5m (24.6ft)

Includes: Abrasive Paper

9046

419

ELECTRIC FINISHING SANDER



Continuous running input	600W
Red size	110x65mm (4.33x2.56")
abrasive paper size	110x100mm (4.33x3.94")
Orbits per minute (OPM)	6,000
Overall length	260mm (10.24")
Net weight	2.3kg (5.07lb)
Power supply cord	2.5m (8.2ft)

Includes: Abrasive paper, Dust bag

9031

411

ELECTRIC BELT SANDER



Continuous running input	550W
Belt size	230x550mm (9.05x21.65")
Belt speed	33x1,000mm/min (500-2,000mm/min)
Overall length	580mm (22.83")
Net weight	2.1kg (4.63lb)
Power supply cord	2.5m (8.2ft)

Includes: Abrasive belt

9902

300

ELECTRIC BELT SANDER



Continuous running input	1,100W
Belt size	75x530mm (2.95x21")
Belt speed	400mm/min (1,574mm/min)
Overall length	230mm (9.09")
Net weight	4.2kg (9.26lb)
Power supply cord	5.0m (16.4ft)

Includes: Abrasive belt, Dust bag assembly

9404

300

ELECTRIC BELT SANDER



Continuous running input	1,100W
Belt size	100x530mm (3.94x21")
Belt speed	210-1,000mm/min (600-1,400mm/min)
Overall length	324mm (12.76")
Net weight	6.7kg (14.78lb)
Power supply cord	5.0m (16.4ft)

Includes: Abrasive belt, Dust bag assembly



DKP180RF DKP180Z CORDLESS PLANNER



	18V LXT	18V LXT
Planing width	82mm (3-1/4")	82mm (3-1/4")
Planing depth	2.0mm (5/64")	2.0mm (5/64")
No load speed (RPM)	14,000	14,000
Dimensions (L x W x H)	335x157x160mm (13-1/8x6-1/8x6-3/8")	335x157x160mm (13-1/8x6-1/8x6-3/8")
Net weight	2.2-0.5kg (4.8-1.1 lbs)	2.2-0.5kg (4.8-1.1 lbs)

Includes: Sharpening holder assembly, Triangle file, Socket wrench.
 D69911RF: Charger, 1pc Battery, Carry case.
 D69911Z: Does not come with charger & battery.

N1923B ELECTRIC POWER PLANNER



Continuous rating input	600W
Planing width	82mm (3-1/4")
Planing depth	1mm (1/32")
Max slip coupling	23mm (15/16")
No load speed (RPM)	15,000
Overall length	220mm (11-3/8")
Net weight	2.1kg (4.6 lbs)
Power supply cord	2.5m (8.2')

Includes: Sharpening holder assembly, Blade gauge, Socket wrench, Guide rule.

1600 ELECTRIC POWER PLANNER



Continuous rating input	150W
Planing width	62mm (2-1/2")
Planing depth	2mm (1/16")
No load speed (RPM)	17,000
Overall length	375mm (14-3/4")
Net weight	0.5kg (1.1 lbs)
Power supply cord	5.0m (16.4')

Includes: Sharpening holder assembly, Triangle file, Socket wrench.

N1900B ELECTRIC POWER PLANNER



Continuous rating input	500W
Planing width	82mm (3-1/4")
Planing depth	1mm (1/32")
No load speed (RPM)	15,000
Overall length	230mm (9-1/8")
Net weight	2.5kg (5.5 lbs)
Power supply cord	2.5m (8.2')

Includes: Sharpening holder assembly, Blade gauge, Socket wrench, Guide rule.

KP0800X ELECTRIC POWER PLANNER



Continuous rating input	600W
Planing width	82mm (3-1/4")
Planing depth	2.0mm (5/64")
No load speed (RPM)	17,000
Dimensions (L x W x H)	285x158x150mm (11-1/4x6-1/8x5-7/8")
Net weight	2.6kg (5.7 lbs)
Power supply cord	2.5m (8.2')

Includes: Sharpening holder assembly, Blade gauge, Socket wrench, Guide rule.

1100 ELECTRIC POWER PLANNER



Continuous rating input	750W
Planing width	82mm (3-1/4")
Planing depth	2mm (1/16")
Max slip coupling	26mm (24/32")
No load speed (RPM)	18,000
Overall length	415mm (16-3/8")
Net weight	5.1kg (11.2 lbs)
Power supply cord	5.0m (16.4')

Includes: Sharpening holder assembly, Blade gauge, Socket wrench, Guide rule.

1911B ELECTRIC POWER PLANNER



Continuous rating input	840W
Planing width	110mm (4-3/8")
Planing depth	2mm (1/16")
No load speed (RPM)	18,000
Overall length	255mm (10")
Net weight	4.1kg (9.0 lbs)
Power supply cord	5.0m (16.4')

Includes: Sharpening holder assembly, Blade gauge, Socket wrench, Guide rule.

ICON GUIDE



1804N

ELECTRIC POWER PLANNER

153



Continuous rating input	960W
Planing width	125mm (5-1/8")
Planing depth	3mm (1/8")
No load speed (RPM)	16,000
Overall length	445mm (17-1/2")
Net weight	7.0kg (15.4lb)
Power supply cord	5.0m (16.4ft)

Includes: Sharpening roller assembly, Blade gauge, Backer board.

1805N

ELECTRIC POWER PLANNER

153



Continuous rating input	1,140W
Planing width	125mm (5-1/8")
Planing depth	3mm (1/8")
No load speed (RPM)	16,000
Overall length	445mm (17-1/2")
Net weight	7.0kg (15.4lb)
Power supply cord	5.0m (16.4ft)

Includes: Sharpening roller assembly, Blade gauge, Backer board.

1806B

ELECTRIC POWER PLANNER

153



Continuous rating input	1,200W
Planing width	113mm (4-3/8")
Planing depth	3mm (1/8")
No load speed (RPM)	15,100
Net weight	3.8kg (8.3lb)
Power supply cord	5.0m (16.4ft)

Includes: Sharpening roller assembly, Trimble rule, Backer board.

2012NB

ELECTRIC PLANNER

153



Continuous rating input	1,000W
Cutting width	304mm (12")
Cutting depth	3mm (1/8")
Cutting width (1-1/2")	3mm (1/8")
Cutting width (1-3/4")	1.5mm (1/16")
Feed rollers	6.0m (20.0ft)
Table size	304 x 771mm
W x L	(12" x 30-3/8")
No load speed (RPM)	8,500
Net weight	27-1/2" (61.7kg/136lb)

Includes: Table Vices, Hot Wheels, Mayplate holder.

PJ7000

ELECTRIC PLATE JOINER

455



Continuous rating input	700W
Blade diameter	100mm (4")
No load speed (RPM)	11,000
Dimensions (L x W x H)	300x180x145mm
(11-3/8" x 7-1/8" x 5-3/4")	
Net weight	2.8kg (6.2lb)
Power supply cord	2.0m (6.6ft)

Includes: Guide block, Angle guide, Dust bag, Set plate, Lock nut.

PC5001C

ELECTRIC CONCRETE PLANNER

253



Continuous rating input	1,400W
Wheel diameter	125mm (5")
No load speed (RPM)	10,000
Dimensions (L x W x H)	475x120x125mm
(18-3/4" x 4-3/4" x 5")	
Net weight	4kg (8.8lb)
Power supply cord	6m (19.7ft)

Includes: Offset diamond wheel, Lock nut, Wheel, Liner, Guide assembly, Dust bag.

RP0900

ELECTRIC ROUTER (Plunge type)

103



Continuous rating input	600W
Plunge Capacity	0-35mm (1-3/8")
No Load Speed (RPM)	27,000
Dimensions (L x W x H)	110x85x217mm
(4-3/8" x 3-3/8" x 8-1/2")	
Net weight	2.7kg (5.9lb)
Power supply cord	2.5m (8.2ft)

Includes: Straight guide, Straight bit, Dust cover, V-block, Wheel.

3612BR

ELECTRIC ROUTER (Plunge type)

153



Continuous rating input	1,000W
Collet Capacity	12mm or 1/2"
Collet Capacity	0-65mm (1-1/2")
No Load Speed (RPM)	22,000
Dimensions (L x W x H)	180x150x250mm
(7-1/8" x 5-7/8" x 10-1/8")	
Net weight	5.0kg (11.0lb)
Power supply cord	2.0m (6.6ft)

Includes: Throttle guide assembly, Straight guide, Template guide, Guide table, Collet sleeve 1/2", Collet sleeve 3/8", V-block, Straight bit, Straight bit, Straight bit, Straight bit.

3601B

ELECTRIC ROUTER

153



Continuous rating input	900W
Collet Capacity	12mm or 1/2"
No Load Speed (RPM)	22,000
Overall height	180mm (7-1/8")
Net weight	3.0kg (6.6lb)
Power supply cord	5.0m (16.4ft)

Includes: Throttle guide assembly, Straight guide assembly, Template guide, Collet sleeve 1/2", Collet sleeve 3/8", V-block, Straight bit, Straight bit, Straight bit, Straight bit.

3600H

ELECTRIC ROUTER

153



Continuous rating input	1,000W
Collet Capacity	12mm or 1/2"
Collet Capacity	16mm (5/8")
No Load Speed (RPM)	24,000
Overall height	210mm (8-1/4")
Net weight	4.4kg (9.6lb)
Power supply cord	5.0m (16.4ft)

Includes: Throttle guide assembly, Straight guide assembly, Template guide, Collet sleeve 1/2", Collet sleeve 3/8", V-block, Straight bit, Straight bit, Straight bit, Straight bit.

4403

ELECTRIC BASH ROUTER

411



Continuous rating input	500W
Capacity	0-65mm (1-1/2")
Max Width of Work	123mm (4-7/8")
Max Width of Work (45°)	77mm (3")
Max Height of Work	180mm (7-1/8")
No Load Speed (RPM)	22,000
Dimensions (L x W x H)	220x200x250mm
(8-1/4" x 7-7/8" x 10-1/8")	
Net weight	15.0kg (33.0lb)
Power supply cord	2.0m (6.6ft)

Includes: Bash router bit, Collet, Angle guide, V-block, V-block, Collet sleeve 1/2".

DRT50Z

CORDLESS TRIMMER

18V



Max Load Speed (RPM)	10,000-50,000
Plunge Capacity	0-40mm (1-1/2")
with Throttle Trigger	0-50mm (2"-1-3/8")
with Plunge Trigger	130x100x25mm
Dimensions (L x W x H)	(5-1/8" x 4-1/8" x 1-1/8")
with DRT50ZB / DRT50ZB	1.0-2.1kg (2.2-4.6lb)

Tools ONLY
Charger & Battery are sold separately.

N3701

ELECTRIC TRIMMER

51



Continuous rating input	440W
Collet Capacity	6mm or 1/4"
No Load Speed (RPM)	30,000
Overall height	181mm (7-1/8")
Net weight	1.8kg (4.0lb)
Power supply cord	2.0m (6.6ft)

Includes: Throttle guide assembly, Straight guide assembly, Template guide, Straight bit, Straight bit, Straight bit, Straight bit.

3710

ELECTRIC TRIMMER

411



Continuous rating input	500W
Collet Capacity	6mm or 1/4"
No Load Speed (RPM)	30,000
Dimensions (L x W x H)	(170x100x110mm)
(6-3/4" x 4-1/8" x 4-3/8")	
Net weight	1.8kg (3.9lb)
Power supply cord	2.0m (6.6ft)

Includes: Throttle guide assembly, Straight guide assembly, Template guide, Straight bit, Straight bit, Straight bit, Straight bit.

3501N

ELECTRIC GROOVE CUTTER

153



Continuous rating input	1,190W
Max cutter blade size	120x35mm (4-3/4" x 1-3/8")
Cutter	23mm (1-1/8")
Blade	25mm (1-1/8")
No Load Speed (RPM)	0-500
Overall length	330mm (14-3/8")
Net weight	7.2kg (15.8lb)
Power supply cord	0-0m (0-0ft)

Includes: Sharpening roller assembly, Right hand guide, Dust bag, Dust bag, V-block, V-block, V-block, V-block.



CARRYING CASE



DOUBLE INSULATION



DUST COLLECTING



WOODEN CASE



DVC260Z

CORDLESS BACKPACK VACUUM CLEANER

18V



Capacity
Continuous Use (min.)

Max Air Flow
Max Suction Station
Sound Power Level
Dimensions
(L x W x H)
Net weight



Filter & Paper dust bag 2 CL
Cordless bag 1.5 L
with BL1800S (18V) 40
with BL1800S (18V) 40
1.0 m/min
7.1 kPa (71 mmHg)
72 dB(A) re 1 Pa
230 x 150 x 100 mm
(9.1 x 5.9 x 3.9 in)
2.1 kg (4.6 lb)

Includes: Floor Nozzle, Pro Nozzle, Extension Wand, Hose End Plug, New End Plug Bag.
Charger & Battery are sold separately.

DRC200Z

ROBOTIC VACUUM CLEANER

18V



Continuous Use (min.)
Max cleaning area

Max running speed
Load box Capacity
Dimensions
(L x W x H)
Net weight



4.0 BL1800S (18V) x2 200
with BL1800S (18V) x2 100
with BL1800S (18V) x2 100
0.3 m/min
2.5 L
400 x 200 x 100 mm
(15.7 x 7.9 x 3.9 in)
2.7 kg (5.9 lb)

Includes: Wireless remote control (battery pack included), Charger & Battery are sold separately.

DVC350Z

CORDLESS VACUUM CLEANER

18V



Max Air Flow
Max Suction Station
(water column)

Recoverable capacity
Dimensions
(L x W x H)
Net weight



1.4 m/min
5.0 kPa (50 mmHg)
Recoverable capacity
270 x 150 x 25 mm
(10.6 x 5.9 x 1 in)
2.2 kg (4.8 lb)

Includes: Vacuum assembly, Dust bag, 2-in-1 Power, Suction belt, Charger & Battery are sold separately.



CL111DWI

CORDLESS CLEANER (with battery)

10.8V



Capacity
Continuous Use (min.)

Max Air Flow
Max Suction Station
(water column)
Dimensions
(L x W x H)
Net weight



500 ml
12
1.5 m/min
3.0 kPa
(30 mmHg)
90 x 170 x 60 mm
(3.5 x 6.7 x 2.4 in)
0.54 kg (1.2 lb)

Includes: Tool, charger, Handle assembly.

CL106FDWYW

CORDLESS CLEANER



Capacity
Continuous Use (min.)

Max Air Flow
Max Suction Station
(water column)
Dimensions
(L x W x H)
Net weight



12V MAX
600 ml
with BL1800S (18V) 40
1.0 m/min
3.1 kPa
(31 mmHg)
90 x 170 x 60 mm
(3.5 x 6.7 x 2.4 in)
1.0 kg (2.2 lb)

Includes: CL106FDWYW, Charger, 2-in-1 Battery, Carrying case, CL106FDZW, Dust container with trigger & safety.

DCL180Z

CORDLESS CLEANER

18V



Capacity
Continuous Use (min.)

Max Air Flow
Max Suction Station
(water column)
Dimensions
(L x W x H)
Net weight



600 ml
with BL1800S (18V) 40
1.4 m/min
4.2 kPa (42 mmHg)
90 x 170 x 60 mm
(3.5 x 6.7 x 2.4 in)
1.2 kg (2.7 lb)

TOOLS ONLY
Charger & Battery are sold separately.

DVC860LZ

AC/DC VACUUM CLEANER (wet & dry)

18V



Capacity
Continuous Use (min.)

Max Air Flow
Max Suction Station

Sound Power Level
Sound Pressure Level
Dimensions
(L x W x H)
Net weight



Dust / Water 8 L
with BL1800S (18V) 40
AC/DC 2.0 x 1.2 m/min
AC 240 V (114 Hz)
DC 14.4 V (1.2 Hz)
AC/DC 100 x 25 x 70 mm
2.2 kg (4.8 lb)
(18.8 dB)
4.6 x 9.5 kg (10.1 x 21.0 lb)

Includes: Charger, Battery, Nozzle, extension, Dusting assembly, Hose, Smaller set.

Automatic self-cleaning filter
Designed by Trotec for automatic cleaning of the
Power Filter / Dust Filter / Paper Filter
Automatic Vacuum



Always use:
Constantly high suction power
Always filter cleaning - always by tapping and off on Position
Dust cleaning between: Empty and Position on the wall



VC1310LX1

ELECTRIC VACUUM CLEANER (wet & dry)

173

Continuous Use (min.)
Max suction station
(water column)
Tank capacity

Dimensions
(L x W x H)
Net weight
Power supply and
includes: Hose, complete 28.5 m (94 ft) out 38, Motor 10.3
No. 12.34, Poly top set.



1.05 kW
2.0 m/min
22.14 kPa
(221.4 mmHg)
Dust 1.8
Water 1.7
300 x 200 x 200 mm
(11.8 x 7.9 x 7.9 in)
3.0 kg (6.6 lb)
0.0 m (0.0 ft)

VC3210LX1

ELECTRIC VACUUM CLEANER (wet & dry)

173

Continuous Use (min.)
Max suction station
(water column)
Tank capacity

Dimensions
(L x W x H)
Net weight
Power supply and
includes: Hose, complete 28.5 m (94 ft) out 38, Motor 10.3
No. 12.34, Poly top set.



1.05 kW
2.0 m/min
22.14 kPa (221.4 mmHg)
Dust 1.8
Water 1.7
300 x 200 x 200 mm
(11.8 x 7.9 x 7.9 in)
3.0 kg (6.6 lb)
0.0 m (0.0 ft)





Makita



Outdoor Power Equipment

DUC122RF

18V 431

CORDLESS CHAIN SAW



Guide Bar Length	115mm (4-1/2")
Chain Pitch	1/4"
Chain Gauge	1.3mm (0.05")
Chain Speed	5.2m/s (200km/h) (380 FPM)
Chain Oil Tank Volume	90ml (2.7 US fl oz)
Sound Power Level	92.7dB(A)
Vibration Level	Cutting Wood: 4.3m/s²
Dimensions (L x W x H)	402x152x215mm
Net weight	2.8kg (6.18lb)

Includes: Safety Guide bar cover, Oil supply file

EA3503S40B

PETROL CHAIN SAW



Guide bar length	400mm (15 7/8") 580mm (22 7/8") 800mm (31 1/2")
Chain blade	Pitch: 3/8"
	Gauge: 1.1mm (0.043") 1.3mm (0.051")
Displacement	35.0L
Engine power	1.1kW/1.5 HP
Fuel tank	0.4L
Chain oil tank	0.2L
Dimensions (L x W x H)	415x285x72mm
Power head weight	4.0kg (8.8lb)

Includes: Guide Bar, Saw Chain, Guide Bar Cover, Saddle Weirch, Sawminder

DUC353Z

18V

CORDLESS CHAIN SAW



Guide Bar Length	300mm (14")
Chain Pitch	3/8"
Chain Gauge	1.1 / 1.3mm (0.043" / 0.051")
Chain Speed	0 - 20m/s
Chain Oil Tank Volume	200ml
Sound Power Level	100.4dB(A)
Dimensions (L x W x H)	772x152x215mm
Net weight	4.6 - 5.5kg (10.1 - 12.1lb)

TOOL ONLY
Charger & Battery are sold separately**5012B**

153

ELECTRIC CHAIN SAW



Continuous rating Input	1.140W
Chain speed per minute	1.900m (5.240")
Guide bar length	300mm (12")
Chain blade	Pitch: 3/8"
	Gauge: 0.150"
Overall length	950mm (37")
Net weight	4.4kg (9.6lb)
Power supply cord	5.0m (16.4')

Includes: Chain Blade, Oil Supply 10ml, Saddle Weirch, File Sawminder

5016B

153

ELECTRIC CHAIN SAW



Continuous rating Input	1.300W
Chain speed per minute	400m (1.310")
Guide bar length	405mm (16")
Chain blade	Pitch: 3/8"
	Gauge: 0.150"
Overall length	750mm (29-1/2")
Net weight	6.8kg (12.7lb)
Power supply cord	5.0m (16.4')

Includes: Chain Blade, Oil Supply 10ml, Saddle Weirch, File Sawminder

DUR182UZ

18V

CORDLESS GRASS TRIMMER



No load speed (RPM)	5,600/4,200
Spindle size	M10 x 1.25/11
Sound pressure level	79dB(A)
Sound power level	50dB(A)
Vibration level Left handle	2.5m/s²
Vibration level Right handle	2.5m/s²
Dimensions (L x W x H)	1,845x254x70mm
	(72-107x24-68x18-24")
Max. output	220W
Net weight	5.5kg (12.0lb)

TOOL ONLY
Charger & Battery are sold separately**DUR361URF2**

CORDLESS GRASS TRIMMER



Cutting Width	Mark Blade 2.8mm (0.11")
No Load Speed (RPM)	3,500 - 7,500
Spindle Size	M8 x 1.25LH
Sound Pressure Level	82dB(A)
Sound Power Level	62dB(A)
Vibration Level	Left: 2.5m/s² Right: 2.5m/s²
Dimensions (L x W x H)	1,810x254x58mm
	(71-10"x10"x2.3"x0.11")
Max Run Time (min)	with BL1600: 150
Net weight	3.1 - 5.8kg (11.3 - 12.7lb)

Includes: Shoulder harness with single shoulder strap, Wrenches, DUR361URF2: Charger, 36V Battery, Carrying case, DUR361UZ: Double sided combi digger & battery

UR100DZ

12V

CORDLESS STRING TRIMMER



Cutting Width	Nylon Cutting Head: 280mm (11")
	Plastic Blade: 220mm (9")
No Load Speed (RPM)	
Nylon Cutting Head	8,000
Plastic Blade	12,000
Spindle Size	M8 x 1.25LH
Dimensions (L x W x H)	625 x 1,150x210x110 - 315mm
	(24-24" x 45-27" x 10-10" x 4-5" x 12")
Net weight	2.1 - 2.7kg (4.6 - 5.9lb)

TOOL ONLY
Charger & Battery are sold separately**UR180DW**

18V

CORDLESS STRING TRIMMER



Cutting Width	Trimmer Head: 300mm (12-1/4")
No Load Speed (RPM)	1,800
Sound Pressure Level	81dB(A)
Sound Power Level	63.5dB(A)
Vibration Level	2.5m/s²
Dimensions (L x W x H)	1,220 x 1,450x210x95 - 257mm
	(48-48" x 58-57" x 8-10" x 3-10")
Net weight	2.1 - 2.3kg (4.7 - 5.0lb)

Includes: DC18V charger, BL1819G battery, Shoulder belt, Safety goggles, Nylon cutting head, Nylon cord

DUR181Z

18V

CORDLESS STRING TRIMMER



Cutting width	290mm (11-1/4")
No load speed (RPM)	1,800
Sound pressure level	82dB(A)
Sound power level	63.5dB(A)
Vibration level	2.5m/s²
Dimensions (L x W x H)	1,220 x 1,450x210x95 - 257mm
	(48-48" x 58-57" x 8-10" x 3-10")
Net weight	2.3kg (5.0lb)

TOOL ONLY
Charger & Battery are sold separately**DUX60Z**

18V

CORDLESS MULTI-FUNCTION POWER HEAD



No load speed (RPM)	
High	0-3,700
Medium	0-3,200
Low	0-2,700
Dimensions (L x W x H)	1,011x220x70mm
	(39-3/4" x 8-5/8" x 2-3/4")
Net weight	4.1 - 8.7kg (9.0 - 19.2lb)

TOOL ONLY
Charger & Battery are sold separately**BC231UDWB**

36V

CORDLESS BRUSHCUTTER



No load speed (RPM)	18 - 0-7,300
	(0 - 5,400)
Spindle size	M10 x 1.25/11
Sound pressure level	79.7dB(A)
Sound power level	58.6dB(A)
Vibration level Left handle	1.4m/s²
Vibration level Right handle	1.1m/s²
Max. output	0.9kW
Net weight	7.1kg (15.7lb)

Includes: DC36V charger, BL3624 battery, Blade, Universal gear, Shoulder harness with double shoulder strap, Wrenches

EM2500U

PETROL BRUSHCUTTER



Displacement	24.5ml
Engine power	0.77kW/1.1 HP
Fuel Tank Capacity	0.4L
Spindle Size	M8 x 1.25LH
Dimensions (L x W x H)	1,770x500x410mm
	(69-3/4" x 20-1/2" x 16-1/2")
Net weight	4.5kg (9.9lb)

Includes: Nylon cutting head (Full size), Nylon cutting head, Saddle weirch, Hilti wrench, Shoulder harness with single shoulder strap, Guard (optional)

EM3400U

PETROL BRUSHCUTTER



Displacement	34.5ml
Engine power	1.12kW/1.5 HP
Fuel Tank Capacity	0.7L
Spindle Size	M10 x 1.25/11
Sound Pressure Level	66.8dB(A)
Sound Power Level	103.1dB(A)
Dimensions (L x W x H)	1,810x500x420mm
	(71-10" x 20" x 16-1/2")
Net weight	6.4kg (14.1lb)

Includes: Carriage 220mm guard, Blade holder, Single harness, Tool set


EBH340U

PETROL BRUSHCUTTER



Displacement	32.5ml
Engine power	1.00kW/1.35 HP
Fuel Tank Capacity	0.6L
Spindle Size	M10 x 1.25/11
Dimensions (L x W x H)	1,890x500x410mm
	(74-3/4" x 20" x 16-1/2")
Net weight	7.5kg (16.6lb)

Includes: TCT Saw Blade 1044T, Tool set (wrench)



DUB182Z

CORDLESS BLOWER

18V

LITHIUM-ION

Max Air Volume	2.8 m³/min
Max Air Velocity	33 m/s
Max Air Pressure	5.4 Pa (59 mm Hg)
No Load Speed (RPM)	0-18,000
Sound Power Level	59 dB(A)
Sound Power Level	66 dB(A)
Max Fuel Level	7.5 l
Dimensions (L x W x H)	530 x 150 x 212 mm
Net weight	2.0 kg (4.4 lb)

TOOL ONLY
Charger & Battery are sold separately

UB1100

ELECTRIC BLOWER

300



Continuous Running Time	90 min
Max Air Volume	2.8 m³/min
Max Air Velocity	33 m/s
Max Air Pressure	5.4 Pa
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	480 x 160 x 210 mm
Net weight	1.6-2.1 kg (3.5-4.6 lb)
Power supply cord	5m (16 ft)

Includes: Blade assembly

DUB361Z

CORDLESS BLOWER

18V 430

LITHIUM-ION**XPT**
XPT-100-1000

Max Air Volume	18.4 m³/min (130 CFM)
Max Air Velocity	23 m/s (50 MPH)
Max Air Pressure	16.3 Pa (120 mm Hg)
No Load Speed (RPM)	0-17,000
Sound Power Level	92.0 dB(A)
Max Fuel Level	2.5 m³ or less
Dimensions (L x W x H)	560 x 140 x 240 mm
Net weight	2.5-3.0 kg (5.5-6.6 lb)

TOOL ONLY
Charger & Battery are sold separately

UB1101

ELECTRIC BLOWER

300



Continuous Running Time	90 min
Max Air Volume	0-2.8 m³/min
Max Air Velocity	0-33 m/s
Max Air Pressure	0-5.4 Pa
No Load Speed (RPM)	0-16,000
Sound Power Level	59 dB(A)
Dimensions (L x W x H)	480 x 160 x 210 mm
Net weight	1.6-2.1 kg (3.5-4.6 lb)
Power supply cord	5.5 m (18 ft)

Includes: Blade assembly

DUB362Z

CORDLESS BLOWER

18V

LITHIUM-ION**XPT**
XPT-100-1000

Max Air Volume	18.4 m³/min (130 CFM)
Max Air Velocity	23 m/s (50 MPH)
Max Air Pressure	16.3 Pa (120 mm Hg)
No Load Speed (RPM)	0-17,000
Sound Power Level	92.0 dB(A)
Max Fuel Level	2.5 m³ or less
Dimensions (L x W x H)	560 x 140 x 240 mm
Net weight	2.5-3.0 kg (5.5-6.6 lb)

TOOL ONLY
Charger & Battery are sold separately

BHX2500

PETROL BLOWER

4000

Max Air Volume	10.4 m³/min (75 CFM)
Max Air Velocity	23 m/s (50 MPH)
Max Air Pressure	16.3 Pa (120 mm Hg)
No Load Speed (RPM)	0-17,000
Sound Power Level	92.0 dB(A)
Max Fuel Level	2.5 m³ or less
Dimensions (L x W x H)	560 x 140 x 240 mm
Net weight	2.5-3.0 kg (5.5-6.6 lb)

Includes: Tip

INNOVATION

Pressure compensated carburetor
for reduced flooding

CONVENIENCE

Integrated wheel kit retracts
when not in use

PERFORMANCE

Fuel primer bulb for easier
cold starts

DURABILITY

5 Stage filtration system for
better engine durability

EK7651HX1

PETROL POWER CUTTER

4000**4000**

Wheel Diameter	300mm (12")
Engine	75 cc
Max cutting depth	97mm (3 13/16")
No Load Speed (RPM)	4,200
Ground Clearance	30mm
Engine Power	3.7 kW (5.0 hp)
Sound Power Level	101 dB(A)
Fuel Tank Capacity	1.1
Net weight	14kg (31 lbs)

Includes: 1x Chain, 1x Guide Bar

AUTO
DECOMPRESSION

BRAKE

CAPACITOR
DISCHARGE
IGNITIONDOUBLE
INSULATIONELECTRONIC
2-SPEEDPRIMER
PUMP

REVERSING

SOFT
STARTVARIABLE
SPEED

OTHER TOOLS

LD030P

LASER DISTANCE



Measuring range 1-200m
Operating temperature 0-40°C
Storage temperature 0-50°C
Typical measuring tolerance ±20mm / 12in
Max measuring tolerance ±30mm / 12in
Diameter of laser point 5mm / 10in
Laser class Laser class 2, 100mW
Dimensions 117x50x25mm
Weight 140g (3.09oz)
Includes: AA Batteries 2pcs, Carrying strap, Target plate

LD080P

LASER DISTANCE



Measuring Range 0.05m-80m
Power supply Cell battery: AAA 1.5V x 2pcs
Net weight 0.16kg (3.51oz)

Includes: Alkaline battery 2pcs, Carrying strap, Target plate

SK102Z

LASER LEVEL



Leveling accuracy ±3mm / 10m
Measuring Range 30m
Power supply Cell battery: AA 1.5V x 2pcs
Net weight 0.32kg (7.05oz)

Includes: Battery, Bracket, Spirit level, Mounting plate

UT130S

POWER MIXER

100



Continuous mixing input 550W
Belt container 100mm (5-10")
No load speed (RPM) 1,200
Stroke of belt roller position 100mm
Dimensions 640x740x300mm
(25"x29"x12")
Net weight 2.4kg (5.3lb)
Power supply cord 2.5m (8'2")

Includes: Mixer, Bag, etc.

Laser Distance



Laser Level

DCG180Z

CORDLESS CAULKING GUN

18V

AF504Z

PNEUMATIC NAILER



Max caulking force 5.0kN (1,100lbs)
No load speed 2.2k/min (3,000/min)
Max flow 330,000 cc/min
Sound Pressure Level 73 dB(A) or less
Max caulking level 2.5m (8'2")
Dimensions 420x120x50mm
(16.5"x4.7"x1.9")
Net weight 2.1kg (4.63lb)

Includes: Motor, Hose, gun, Piston, Piston Ring, Nozzle



Capacity 10-60mm (25/32"-2")
Length 180mm
Stroke 6.4mm (0.25in)
Operating Pressure 0.6-1.0MPa
(8.7-14.5PSI)
Net weight 1.5kg (3.3lb)

LD050P

LASER DISTANCE



Measuring Range 0.12m-50m
Power supply Cell battery: AAA 1.5V x 2pcs
Net weight 0.1kg (0.22lb)

Includes: Alkaline battery 2pcs, Carrying strap, Target plate

LD080PI

LASER DISTANCE



Measuring Range 0.05m-80m
Power supply Cell battery: AAA 1.5V x 2pcs
Net weight 0.16kg (3.51oz)

Includes: Alkaline battery 2pcs, Carrying strap, Target plate

SKR200Z

LASER LEVEL



Operating range
Rotating beam (diameter) 300m
Point beam (up to) 20m
Rotation Speed (RPM) 0, 300, 450, 700
Leveling accuracy ±3mm / 10m
Leveling range (upward) 1-4
Power supply Cell battery: 2pcs
Operating time (approx. ref) 40
Net weight 1.6kg (3.5lb)

Includes: Remote control, Wall mount, Receiver

AT1022AZ

PNEUMATIC STAPLER



Staple length 10-32mm
Staple width 11.8mm
Covering maximum 400PC/CM (50PS)
Max rate working 200PC/CM (100PS)
Net weight 1.3kg

Pneumatic Tools

ICON GUIDE



Cardboard



Felt



Vinyl sheet



CP100DZ

CORDLESS MULTI-CUTTER

12V



Max cutting capacity
No load speed (RPM)
Working Level
Cutting Cardboard
Sound Pressure Level

Dimension
(L x W x H)
Net weight

0mm (1/16")
300
Subsidiary name
TDS-A or later
with BL 1310, BL 1321 or
2720 (96/123mm)
(100-244/252-244-244)
0.120-0.85kg (1.6-1.0lb)

TOOL ONLY
Charger & Battery are sold separately.

Leather



Rubber mat



Carpet



BBY180

MOTOR-ASSISTED BICYCLE

18V



Compact, foldable frame design for easy to store and
transport.
In motor-assisted mode, the human power required to pedal
is much smaller than in full human power mode.

Dimension
(L x W x H)
Net Weight

1,450x570x1,000mm
(57"x22"x39")
22.5kg (49.6lb)

Includes: DC/AC charger, 18V 1.5Ah battery, Tool light

DMR200

CORDLESS JOB SITE SPEAKER

12V 18V



Speaker Size
Max Output
Bluetooth
Dimension
Net weight

Woofer: Ø70x50mm
Tweeter: Ø25mm
18V: 12W
12V max: 3.5W
40: 4W
4-Ω
AC/DC 150MA/1.5A/100V
SBC
10m (33%)
2.5 - 3.4kg (5.5 - 7.4lb)



BMR103B

CORDLESS JOB SITE RADIO

18V



Frequency Band
Speaker Size
Max Output
Dimension
(L x W x H)
Net weight

FM: 87.5 - 177.5MHz
AM: 57.5 - 108.5kHz
Woofer: Ø70mm x 2
18V: 3.5W x 2
12V max: 1.5W x 2
80 x 110 x 40mm
7.2V: 2.5W x 2
250x165x40mm
(10"x6.5"x1.6")
4.4 - 5.2kg (9.7 - 11.5lb)



DCU180Z

BATTERY-POWERED WHEEL BARROW

18V



Max. run time
Max. load capacity
Traveling speed
Forward
Reverse
Max. climbing capacity
Net weight
Dimension
(L x W x H)
Net weight

120
170kg (375lb)
High: 0.3km/h
Low: 0.1km/h
3-Tonish
12
44.5-46.0kg (98.0-101.3lb)
20.5-20.6kg (45.3-45.4lb)

TOOL ONLY
Charger, Battery, & Accessories are sold separately.



CLX201

12V MAX

12V MAX COMBO KIT



Includes:

TD110D (Cordless Impact Driver) 1pc
 DF331D (Cordless Driver Drill) 1pc
 BL1018 (1.5Ah - 12v max Batteries) 2pcs
 DC10WD (12v max fast charger) 1pc
 Carrying Bag 1pc

DF331D

CORDLESS DRIVER DRILL

12V MAX



Capacity
 Steel: 13mm (3/8")
 Wood: 21mm (13/16")
 Masonry: 8mm (5/16")
 Chuck capacity: 13-19mm (1/2"-3/8")
 H: 0-1,700 RPM (0-450)
 No Load Speed (RPM)
 Max Fastening Torque
 Max clamping force
 Max Output
 Net weight
 1.1-1.5kg (2.4-3.3lbs)

TD110D

CORDLESS IMPACT DRIVER

12V MAX



Capacity
 Machine screw
 Standard bolt
 High tensile bolt
 Core thread length
 Hex shank
 Impacts per minute (IPM)
 No load speed (RPM)
 Max clamping force
 Net weight
 M4-M8mm (5/32"-3/16")
 M5-M12 (3/16"-1")
 M5-M12 (3/16"-3/8")
 22-50mm (7/8"-2-1/2")
 8.35mm (1/4")
 0-3,500
 0-2,800
 110 Nm (80 ft-lbs)
 1.0-1.2kg (2.2-2.6lbs)

CLX202

12V MAX

12V MAX COMBO KIT



Includes:

HP331D (Cordless Hammer Driver Drill) 1pc
 TD110D (Cordless Impact Driver) 1pc
 BL1018 (1.5Ah - 12v max CXT Batteries) 2pcs
 DC10WD (12v max fast charger) 1pc
 Carrying Case 1pc

HP331D

CORDLESS HAMMER DRIVER DRILL

12V MAX



Capacity
 Steel: 13mm (3/8")
 Wood: 21mm (13/16")
 Masonry: 8mm (5/16")
 Chuck capacity: 13-19mm (1/2"-3/8")
 H: 0-2,500 RPM (0-450)
 No Load Speed (RPM)
 Max Fastening Torque
 Max clamping force
 Net weight
 1.1-1.5kg (2.4-3.3lbs)

TD110D

CORDLESS IMPACT DRIVER

12V MAX



Capacity
 Machine screw
 Standard bolt
 High tensile bolt
 Core thread length
 Hex shank
 Impacts per minute (IPM)
 No load speed (RPM)
 Max clamping force
 Net weight
 M4-M8mm (5/32"-3/16")
 M5-M12 (3/16"-1")
 M5-M12 (3/16"-3/8")
 22-50mm (7/8"-2-1/2")
 8.35mm (1/4")
 0-3,500
 0-2,800
 110 Nm (80 ft-lbs)
 1.0-1.2kg (2.2-2.6lbs)

DK1202

10.8V

10.8v COMBO KIT



Includes:

HP330D (Cordless Hammer Driver Drill) 1pc
 MR051 (Cordless AM-FM Radio) 1pc
 BL1013 (1.3Ah - 10.8v Lithium Batteries) 2pcs
 DC10WA (10.8v charger) 1pc
 Carrying Bag 1pc



HP330D

CORDLESS HAMMER DRIVER DRILL

10.8V



Capacity
 Steel: 13mm (3/8")
 Wood: 21mm (13/16")
 Masonry: 8mm (5/16")
 Chuck capacity: 13-19mm (1/2"-3/8")
 H: 0-2,500 RPM (0-450)
 No Load Speed (RPM)
 Max Fastening Torque
 Net weight
 1.1kg (2.4lbs)

MR051

CORDLESS AM - FM RADIO

10.8V



Frequency band
 Continuous use (hours)
 Dimensions
 Max weight
 FM: 87.5-108MHz
 AM: 522-1602kHz
 2.5
 100x50x70mm
 (5-5/8"x1-1/2"x1-1/8")
 0.40kg (1.1lbs)

DLX2069M

18V

18v COMBO KIT



Includes:

DHR263 (Cordless Combination Hammer) 1pc
 DHP456 (Cordless Hammer Driver Drill) 1pc
 BL1840 (4.0Ah - 18v LXT Batteries) 2pcs
 DC18RC (18v fast charger) 1pc
 Carrying Bag 1pc

DHR263

CORDLESS COMBINATION HAMMER

18V 442



Impact energy
 Capacity
 Blow per minute (BPM)
 No load speed (RPM)
 Dimensions
 L x W x H
 Net weight
 2.5
 Cordless: 25mm (1")
 Steel: 13mm (1/2")
 Wood: 25mm (1-1/4")
 3,500
 0-1,200
 374x116x232mm
 (14-5/8"x4-9/16"x9-1/8")
 4.2-5.1kg (9.2-11.2lbs)

DHP456

CORDLESS HAMMER DRIVER DRILL

18V 440



Capacity
 Steel: 13mm (1/2")
 Wood: 25mm (1-1/4")
 Masonry: 13mm (1/2")
 H: 0-2,500 RPM (0-450)
 No Load Speed (RPM)
 Max Fastening Torque
 Net weight
 4.2-5.1kg (9.2-11.2lbs)



BRAKE

BUILT-IN
JOB LIGHT

DUST COLLECTING

KEYLESS
CHUCKMECHANICAL
2 SPEED

REVERSING

TORQUE
LIMITERTORQUE
SETTING 16TORQUE
SETTING 18VARIABLE
SPEED

CHARGERS & BATTERIES

Anytime Charge

No Memory Effect
No discharging required



Shock Absorbing Heavy Duty Pack



Longtime Storage Low Self Discharge



Built-in-CPU

The built-in CPU in battery records the battery usage history and transmits it to the charger.



Digital
Communication



Built-in CPU

The CPU built in the charger analyzes its condition; high temperature, re-charge after full charged, over-discharging. The battery lasts long life because it can be charged at the best method and time.



DC07SA

7.2V CHARGER

7.2V

LITHIUM-ION



Part No. (194260-0)

BL7010

7.2V (1.0Ah) BATTERY

7.2V

LITHIUM-ION



Part No. (194955-0)

Charging Time: 30 minutes

DC10WA

10.8V CHARGER

10.8V

LITHIUM-ION



Part No. (194583-1)

BL1013

10.8V (1.5Ah) BATTERY

10.8V

LITHIUM-ION



Part No. (505593-3)

Charging Time: 20 minutes

DC10WD

12V MAX CHARGER

12V

CXT



Part No. (187343-0)

BL1016

12V MAX (1.5Ah) BATTERY

12V

CXT



Part No. (502F55-0) Charging Time: 50 minutes

BL1041B

12V MAX (4.0Ah) BATTERY

12V

CXT



Part No. (502F53-0) Charging Time: 120 minutes

DC18RC (1 Port)

18V LXT CHARGER

18V

LXT



Part No. (15654-2)

DC18RD (2 Ports)

18V LXT CHARGER

18V

LXT



Part No. (146503-0)

BL1830B

18V (3.0Ah) LXT BATTERY

18V

LXT



Part No. (197548-5) Charging Time: 22 minutes

BL1850B

18V (5.0Ah) LXT BATTERY

18V

LXT



Part No. (612F15-1) Charging Time: 45 minutes

BL3622A

36V (2.2Ah) BATTERY

36V

LITHIUM-ION



Part No. (185410-5) Charging Time: 90 minutes

BCV302

36V CONVERTER SET

36V

LITHIUM-ION



Part No. (185042-2)


Fast Charging with Cooling fan



Well Balanced Cooling

The design which air flows efficiently overall and can cool the cells evenly and rapidly. Well balanced cooling system prevents the load to a part of cell and makes the battery life longer.

Makita's Optimum Air flow



Competitor A Unbalanced Cooling Out of air flow




Extreme Stamina

Life time work volume


The charger communicates with the individual cell in battery and then it controls current, voltage, and temperature. The both rapid and optimum charge was achieved. It made battery life longer.

Total Power Delivery Amount of each battery's service lifetime

Traditional Charging Method

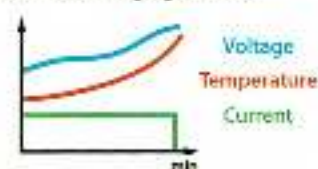

Optimum Charging



MKP1SA122

12V MAX POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 1	EL1016	10AH	1	DC1070	1870205

CHARGING TIME: 30 MINUTES

MKP1RT181

18V LXT POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 1	EL1808	10AH	1	DC1070	1802104

CHARGING TIME: 45 MINUTES

MKP1RF181

18V LXT POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 1	EL1808	10AH	1	DC1070	1802104

CHARGING TIME: 32 MINUTES

MKP4PF1841

18V LXT POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 4	EL1808	10AH	2	DC1070	1870548

CHARGING TIME: 32 MINUTES

MKP3PT182

18V LXT POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 1	EL1808	10AH	2	DC1070	1870548

CHARGING TIME: 45 MINUTES

MKP4PT1831

18V LXT POWER SOURCE KIT



POWER SOURCE CONTENTS					
NAME	MODEL	AP	QTY	CHARGE	UNIT NO.
TYPE 4	EL1808	10AH	2	DC1070	1870548

CHARGING TIME: 45 MINUTES

OTHERS

DML802

18V

CORDLESS LED FLASHLIGHT



Run Time (hrs)
 Illuminance
 at 1m from the light source
 Luminaire flux
 Dimensions
 (L x W x H)
 Net weight

Up to 27
 4,000lx
 190lm
 250x50x110mm
 (19.3x3.9x4.3in)
 0.65kg (1.43lb)

CHARGER & BATTERY ARE SOLD SEPARATELY

DML805

18V

AC/DC LED FLASHLIGHT



Run Time (hrs)
 Illuminance
 at 3.5m from the light source
 at 1m from the light source
 Luminaire flux
 Dimensions
 (L x W x H)
 Net weight

Up to 17hrs
 11,000lx
 1 x 150lx
 H: 200lx
 L: 200lx
 H: 750lx
 L: 450lm
 22 x 27 x 151 x 50mm

CHARGER & BATTERY ARE SOLD SEPARATELY

LED FLASH LIGHTS

DML806

18V

CORDLESS LED FLASHLIGHT



Run Time (hrs)
 Illuminance
 at 0.5m from the light source
 Luminaire flux
 Dimensions
 (L x W x H)
 Net weight

Up to 71
 810lx
 1 x 810lx
 H: 810lx
 L: 250lx
 230x70x110mm
 (9.1x2.8x4.3in)
 0.55kg (1.21lb)

CHARGER & BATTERY ARE SOLD SEPARATELY

**Makita**

**CORDLESS
 LED FLASHLIGHT
 & WORK LIGHT**

**DML802, DML805 & DML806**

ICON GUIDE

XPT
 Extreme Protection
 Technology

BL
 Brushless Motor

LXT
 Lithium Ion eXtreme Technology

CXT
 Compact eXtreme Technology

OTHERS

DFJ206Z

12V 18V

CORDLESS FAN JACKET

Run time (hrs)
with BL1830BAir flow settings
Air flowSize
Pockets
Net weightLow/Medium/High
40/20.5/13.5
Turbo, High, Medium & Low
2.1/1.5/1.3/1.3 m³/min
S (M) (L) (XL)
0
580g (1.3 lbs)

CHARGER & BATTERY ARE SOLD SEPARATELY.

DFJ207Z

12V 18V

CORDLESS FAN JACKET

Run time (hrs)
with BL1830BAir flow settings
Air flowSize
Pockets
Net weightLow/Medium/High
40/20.5/13.5
Turbo, High, Medium & Low
2.1/1.5/1.3/1.3 m³/min
S (M) (L) (XL)
0
580g (1.3 lbs)

CHARGER & BATTERY ARE SOLD SEPARATELY.

DFJ405Z

12V 18V

CORDLESS FAN JACKET

Run time (hrs)
with BL1830BAir flow settings
Air flowSize
Pockets
Net weightLow/Medium/High
40/20.5/13.5
Turbo, High, Medium & Low
2.1/1.5/1.3/1.3 m³/min
S (M) (L) (XL)
0
440g (1.0 lbs)

CHARGER & BATTERY ARE SOLD SEPARATELY.

CORDLESS FAN JACKET

DFJ407Z

12V 18V

CORDLESS FAN JACKET

Run time (hrs)
with BL1830BAir flow settings
Air flowSize
Pockets
Net weightLow/Medium/High
40/20.5/13.5
Turbo, High, Medium & Low
2.1/1.5/1.3/1.3 m³/min
S (M) (L) (XL)
0
400g (1.0 lbs)

CHARGER & BATTERY ARE SOLD SEPARATELY.

CORDLESS
FAN JACKETS

ICON GUIDE

XPT

Extreme Protection
Technology

BL

Brushless Motor

LXT

Lithium-Ion eXtreme Technology

CXT

Compact eXtreme Technology



M6500M 64
HIGH SPEED DRILL



Continuous rating input
Capacity
Steel 12mm (1/2")
Wood 8mm (5/16")
No Load Speed (RPM) 4,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.1m (6.9')

Includes: Chuck key, Side grip



M0600M 64
DRILL



Continuous rating input
Capacity
Steel 13mm (1/2")
Wood 10mm (3/8")
No Load Speed (RPM) 2,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.2kg (2.6lb)
Power supply cord 2.0m (6.6')

Includes: Chuck key, Side grip



M6200M 303
DRILL



Continuous rating input
Capacity
Steel 13mm (1/2")
Wood 10mm (3/8")
No Load Speed (RPM) 2,000
Speed Power Level 55 (55%)
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.2kg (2.6lb)
Power supply cord 2.0m (6.6')

Includes: Chuck key, Side grip, Chuck key holder



M0801M 85
HAMMER DRILL



Continuous rating input
Capacity
Concrete 10mm (3/8")
Steel 10mm (3/8")
Wood 10mm (3/8")
No Load Speed (RPM) 2,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.2kg (2.6lb)
Power supply cord 2.0m (6.6')

Includes: Chuck key, Side grip

M8700M 409
ROTARY HAMMER



Continuous rating input
Impact Energy Capacity
Blows Per Minute (BPM) 1,100
No Load Speed (RPM) 2,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip, Tool bag, Drill bit (M4487)

M8600M 105
DEMOLITION HAMMER



Continuous rating input
Impact Energy Capacity
Blows Per Minute (BPM) 1,100
No Load Speed (RPM) 2,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip, Side grip

M2401M 303
PORTABLE CUT-OFF



Continuous rating input
Wheel diameter 225mm (9")
No Load Speed (RPM) 2,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip, Side grip

M4301M 64
JIG SAW



Continuous rating input
Max Cutting Capacity
Length of Stroke
Blows Per Minute (BPM) 1,100
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip

M4302M 411
JIG SAW



Continuous rating input
Max Cutting Capacity
Length of Stroke
Blows Per Minute (BPM) 1,100
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip

M4500M 303
RECIPRO SAW



Continuous rating input
Length of Stroke
Blows Per Minute (BPM) 1,100
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip

M5801M 303
CIRCULAR SAW



Continuous rating input
Max Cutting Capacity
Length of Stroke
Blows Per Minute (BPM) 1,100
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip, Side grip

M0910M 493
ANGLE GRINDER



Continuous rating input
Wheel diameter 125mm (5")
No Load Speed (RPM) 12,000
Dimensions (L x W x H) 200mm x 130mm
(7.9" x 5.1" x 5.1")
Net weight 1.0kg (2.2lb)
Power supply cord 2.0m (6.6')

Includes: Side grip

FEATURES:

- DOUBLE INSULATION
- BRAKE
- VARIABLE SPEED
- REVERSING
- TORQUE LIMITER
- 17mm HEX SHANK
- 606 PLUS SHANK
- BAYONET SHANK
- MAKITA SHANK
- ORBITAL CUTTING
- CARRYING CASE
- BEVEL CUTTING 45° - 45°

